



## **PRICE LIST**

valid from  
**March 1, 2017**

Distributed by

 **FENCE SCAFFOLD**  
**Action**

**1 877 472-2336**  
**[www.actionscaffold.ca](http://www.actionscaffold.ca)**

# rescue harness

for a quick and safe intervention with a superior fit

**NEW!**



The **Rescue** harness from Tractel® combines safety, versatility and comfort. The special Y-shape design includes a simple attachment point making an easy and quick donning. The strap configuration allows better fastening to the body and gives the worker extra mobility when bending.

**SEE IT ON PAGE 9!**

# table of contents

Harnesses . . . . .	4
Belts . . . . .	11
Accessories for harnesses . . . . .	11
Lanyards . . . . .	12
Positioning lanyards . . . . .	18
Connectors . . . . .	19
Harness kits . . . . .	20
Roof anchors . . . . .	22
Anchorage connectors . . . . .	24
Rope grabs . . . . .	26
Lifelines . . . . .	27
Self-retracting lifelines . . . . .	29
Controlled descent devices . . . . .	30
Manual descent devices . . . . .	31
Accessories for controlled descent devices . . . . .	32
Wind products . . . . .	33
Tripod systems . . . . .	34
Accessories for tripod systems . . . . .	35
Retrieval lifelines . . . . .	35
Pulleys . . . . .	36
Temporary horizontal lifeline systems . . . . .	36
Stanchion and kits . . . . .	37
Permanent horizontal lifeline systems . . . . .	38
Permanent anchorage . . . . .	44
Faba ladders . . . . .	44
Anchor testers . . . . .	44
stopcable® ladder systems . . . . .	45
portable and non-penetrating guardrails . . . . .	46
Dock gate . . . . .	50
Vertical lift gate . . . . .	50
Mezzanine safety gate . . . . .	51

# harnesses

at a glance

SERIES	MODEL	DORSAL D-RING	SIDE POS. D-RING	STERNAL D-RING	FRONTAL D-RING(S)	SHOULDER D-RING	QUICK- CONNECT LEGS	TONGUE AND BUCKLE LEGS	AUTO BUCKLES	SHOULDER/ TRAX PAD(S)	LEG PADS	BELT	ELASTICITY (ELASPAC)	APPLICATIONS	PAGE
PHOENIX T5	AC032	■					■							A	9
PHOENIX T5	AD032	■						■						A	9
VERSAFIT	AC732	■					■							A	8
VERSAFIT	AD732	■						■						A	8
TRACX	AD732_/X	■						■		■				A	7
TRACX	AU732_/X	■							■	■				A	7
TRACX	AD732_/XT	■						■		■	■			A	7
TRACX	AU732_/XT	■							■	■	■			A	7
VERSAFIT	AC742	■	■				■							AP	8
VERSAFIT	AD742	■	■					■						AP	8
TRACX	AD742_/X	■	■					■		■				AP	7
TRACX	AU742_/X	■	■						■	■				AP	7
KEVLAR®	ACK04	■	■				■							AP	9
TRACX	EBD95_/X	■	■					■		■		■		AP	7
CONSTRUCTION	EBD95_	■	■					■		■		■		AP	8
TRACX	EBU95_/X	■	■						■	■		■		AP	7
ELASTRAC®	FMT95L	■	■						■	■	■	■	■	AP	6
TRACX	AD742_/XT	■	■					■		■	■			AP	7
TRACX	AU742_/XT	■	■						■	■	■			AP	7
TRACX	EBD95_/XT	■	■					■		■	■	■		AP	7
TRACX	EBU95_/XT	■	■						■	■	■	■		AP	6
X-STYLE	AC542	■	■	■			■							ALP	6
TRACX	AU7132_/X	■	■	■					■	■				ALP	7
TRACX	AU7132_/XT	■	■	■					■	■	■			ALP	7
TOWERPRO	FBD_	■	■	■				■		■		■		ALP	10
DERRICK	EHBF02RL	■			■			■				■		AD	10
VERSAFIT	AC7102	■	■	■		■	■							AELP	8
VERSAFIT	AD7102	■	■	■		■		■						AELP	8
RESCUE	FUY119_	■	■	■	■				■	■	■	■		ADLP	9
TRACX	AU7112_/X	■	■	■	■				■	■				ADLP	7
TRACX	AU7112_/XT	■	■	■	■				■	■	■			ADLP	7



Fall arrest  
CSA group A



Suspension/Descent  
CSA group D



Retrieval  
CSA group E



Ladder climbing  
CSA group L



Positioning  
CSA Group P




Restraint

# harnesses

at a glance

## SIZES

All harnesses are available in different sizes. Modify part number by adding (or by replacing the letter L) at the end of the part number either the letter(s) S for small, M for medium, XL for X-large or XXL for XX-large.

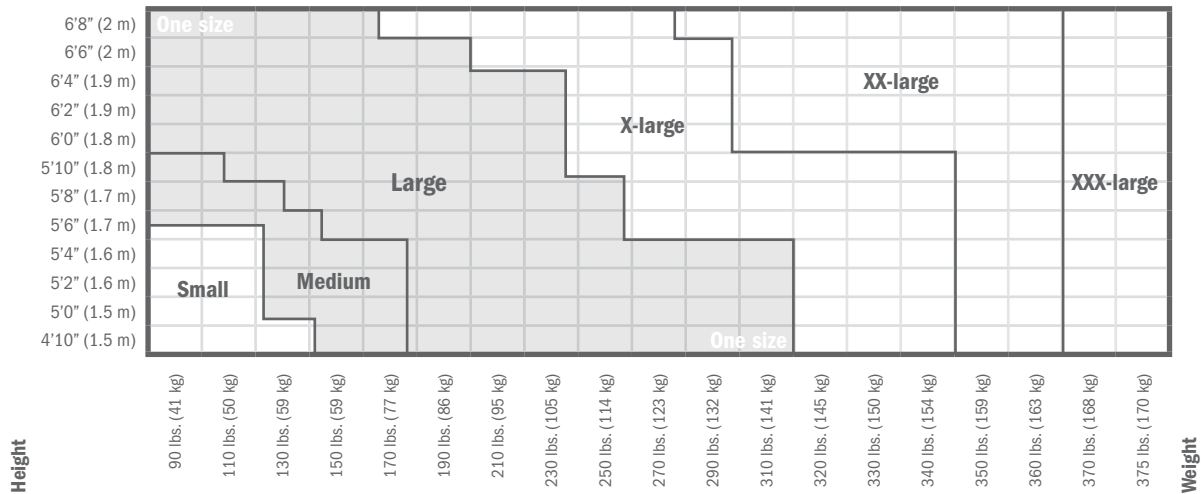

## MODULAR CAPABILITY

Most Tractel® harnesses can accommodate Tractel® belts. Order the belt separately.

Only Tractel®'s most popular models are shown. For specific applications, please contact our Customer Service.

## BELT SIZES

SMALL	MEDIUM	LARGE	X-LARGE	XX-LARGE
31-39 in. (78-100 cm)	35-43 in. (88-110 cm)	38-46 in. (98-120 cm)	44-52 in. (108-130 cm)	46-55 in. (118-140 cm)


All belts are available in different sizes. Modify part number by replacing letter **L** at the end of the part number by either the letter(s) **S** for small, **M** for medium, **XL** for X-large or **XXL** for XX-large.

**WAIST BELTS ARE PROHIBITED FOR FALL ARREST.**


# elastrac<sup>®</sup> harness

flexibility, mobility, durability

## ELASTRAC<sup>®</sup> HARNESS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>FMT95L</b> 	elastrac <sup>®</sup> harness with dual ElasPac cases, auto-buckle legs and chest straps, TracX pad, leg pads, belt, side-positioning D-rings, dorsal D-ring, large	5.8 lbs. (2.6 kg)	<b>\$334.80</b>

Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.

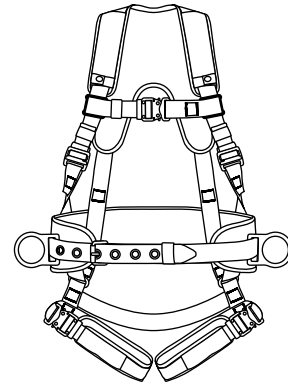

FMT95L

Finally...

A solution to excessive webbing stretch.

Reduces fatigue by...

- controlled webbing stretch
- superior fit
- added comfort
- increase mobility
- unrestricted leg movement

**You Tube**

Check out our video  
on YouTube!

– TractelINA channel –




### Superior mobility

elastrac<sup>®</sup>'s unique leg strap design moves independently from the seat support allowing complete freedom of movement and flexibility while walking, bending or climbing without unwanted tugging or pulling in the groin area.

### Seat support

elastrac<sup>®</sup>'s seat support is independent from the leg straps and stays tucked in place under the seat to arrest and support the body during and after a fall.

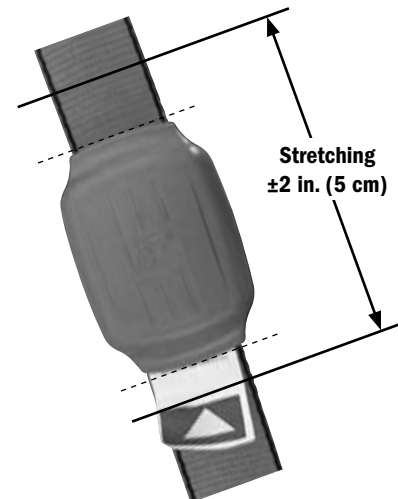

### Dual ElasPac

Replaces conventional stretch webbing with a controlled mechanical pack that limits the harness stretch to a maximum of 2 in. (5 cm) allowing a worker full mobility and freedom of movement while reducing excessive fall distances.

Listed prices are for one size, medium and large sizes harnesses. For small and X-large, add 5% to the price. For XX-large, add 10%.



**1 877 472-2336**  
**www.actionscaffold.ca**



# tracx harness

combining safety and comfort

## TRACX HARNESS – POLYESTER


PART #	DESCRIPTION	WEIGHT	PRICE
<b>AD732/X</b>	TracX harness, tongue and buckle legs, TracX pad, dorsal D-ring, one size	3.4 lbs. (1.5 kg)	<b>\$226.20</b>
<b>AD732/XT</b>	AD732/X with leg pads	3.6 lbs. (1.6 kg)	<b>\$238.30</b>
<b>AU732/X</b>	AD732/X with auto-buckles	3.4 lbs. (1.5 kg)	<b>\$230.60</b>
<b>AU732/XT</b>	AD732/X with auto-buckles and leg pads	3.6 lbs. (1.6 kg)	<b>\$244.80</b>
<b>AD742/X</b>	TracX harness, tongue and buckle legs, TracX pad, side-positioning D-rings, dorsal D-ring, one size	4.1 lbs. (1.9 kg)	<b>\$234.60</b>
<b>AD742/XT</b>	AD742/X with leg pads	4.3 lbs. (2 kg)	<b>\$246.90</b>
<b>AU742/X</b>	AD742/X with auto-buckles	4.2 lbs. (1.9 kg)	<b>\$239.20</b>
<b>AU742/XT</b>	AD742/X with auto-buckles and leg pads	4.5 lbs. (2 kg)	<b>\$253.40</b>
<b>AU7132/X</b>	TracX harness, auto-buckles, TracX pad, side-positioning D-rings, sternal D-ring, fixed chest strap, dorsal D-ring, one size	5.3 lbs. (2.4 kg)	<b>\$243.80</b>
<b>AU7132/XT</b>	AU7132/X with leg pads	5.6 lbs. (2.5 kg)	<b>\$258.00</b>
<b>AU7112/X</b>	AU7132/X with frontal D-rings		<b>\$267.90</b>
<b>AU7112/XT</b>	AU7132/X with frontal D-rings and leg pads		<b>\$275.70</b>

Available sizes: Small, one size fits most, X-large and XX-large.


### TracX Construction harness with belt

<b>EBD95L/X</b>	TracX Construction harness, tongue and buckle legs, TracX pad, padded back support belt with side D-rings, removable tool belt, dorsal D-ring, large	4.1 lbs. (1.9 kg)	<b>\$298.70</b>
<b>EBD95L/XT</b>	EBD95L/X with leg pads	4.3 lbs. (2 kg)	<b>\$318.60</b>
<b>EBU95L/X</b>	EBD95L/X with auto-buckles	4.5 lbs. (2 kg)	<b>\$290.30</b>
<b>EBU95L/XT</b>	EBD95L/X with auto-buckles and leg pads	4.7 lbs. (2.1 kg)	<b>\$310.10</b>


Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.

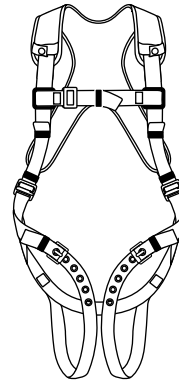


AD732/X



AU742/X



EBU95L/X






Harnesses with “/XT” in their part number feature leg pads


Listed prices are for one size, medium and large sizes harnesses. For small and X-large, add 5% to the price. For XX-large, add 10%.

# versafit harness

## VERSAFIT HARNESS - POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>AC732</b> 	Versafit harness, quick-connect legs, dorsal D-ring, one size	2.2 lbs. (1 kg)	<b>\$102.70</b>
<b>AD732</b> 	AC732 with tongue and buckle legs	2.9 lbs. (1.3 kg)	<b>\$126.30</b>
<b>AC742</b>	AC732 with side-positioning D-rings	3.0 lbs. (1.4 kg)	<b>\$111.70</b>
<b>AD742</b> 	AC742 with tongue and buckle legs	3.6 lbs. (1.6 kg)	<b>\$135.00</b>
<b>AC7102</b>	AC732 with side-positioning D-rings, shoulder-retrieval D-rings, sternal D-ring and fixed chest strap		<b>\$122.50</b>
<b>AD7102</b>	AC7102 with tongue and buckle legs		<b>\$146.80</b>

Available sizes: Small, one size fits most, X-large and XX-large.

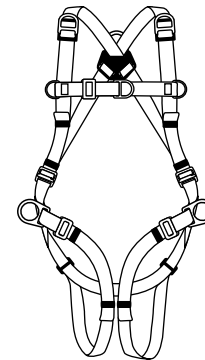

AC7102


height safety / height safety equipment / harnesses

## construction harness

## CONSTRUCTION HARNESS - POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>EBD95L</b>	Construction harness, tongue and buckle legs, removable tool belt, side D-rings, shoulder pads, large	3.6 lbs. (1.6 kg)	<b>\$225.60</b>

Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.




height safety / height safety equipment / harnesses

## x-style harness

## X-STYLE HARNESS - POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>AC542</b>	X-style harness, quick-connect legs, sternal, dorsal and side-positioning D-rings, one size	2.9 lbs. (1.3 kg)	<b>\$135.70</b>
<b>AD542</b>	X-style harness, tongue and buckle legs, sternal, dorsal and side-positioning D-rings, one size	3.5 lbs. (1.6 kg)	<b>\$159.50</b>

Available sizes: Small, one size fits most, X-large and XX-large.




Listed prices are for one size, medium and large sizes harnesses. For small and X-large, add 5% to the price. For XX-large, add 10%.

# kevlar® harness

## KEVLAR® HARNESS – FIRE RETARDANT MATERIAL

PART #	DESCRIPTION	WEIGHT	PRICE
<b>ACK04</b>	Kevlar® harness, quick-connect legs, side-positioning D-rings dorsal D-ring, one size	3 lbs. (1.4 kg)	<b>\$329.70</b>



Available sizes: Small, one size fits most and X-large.




height safety / height safety equipment / harnesses

## phoenix harness

### PHOENIX HARNESS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>AC032</b> 	Phoenix T5 harness, quick-connect legs, one size	2 lbs. (0.9 kg)	<b>\$62.00</b>
<b>AD032</b> 	Phoenix T5 harness, tongue and buckle legs, one size	2.6 lbs. (1.2 kg)	<b>\$74.00</b>

Available sizes: One size fits most and X-large.



AC032


height safety / height safety equipment / harnesses

## rescue harness

### RESCUE HARNESS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>FUY119L</b>	Rescue Y-style harness with independent leg straps with auto buckle, TracX pad, sternal and waist D-rings, large and bent aluminum side D-rings, triple-locking aluminium carabiner, dorsal D-ring, large	5.3 lbs. (2.4 kg)	<b>\$458.40</b>

Available sizes: Medium, large, X-large and XX-large



FUY119L


Listed prices are for one size, medium and large sizes harnesses. For small and X-large, add 5% to the price. For XX-large, add 10%.

# towerpro harness

## TOWERPRO HARNESS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>FBDL</b>	TowerPro harness, tongue and buckle legs, dorsal D-ring, large	7.1 lbs. (3.2 kg)	<b>\$460.60</b>
<b>XSAD1</b>	Saddle for harness	2.2 lbs. (1 kg)	<b>\$118.40</b>

Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.

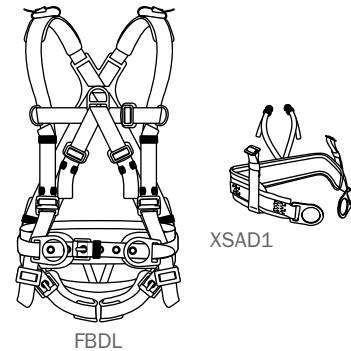


height safety / height safety equipment / harnesses

# derrick harness

## DERRICK HARNESS WITH EXTENDED D-RING – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>EHBFO2RL</b>	Derrick harness, tongue & buckle legs, frontal attachment, dorsal D-ring, large	4.6 lbs. (2.1 kg)	<b>\$507.30</b>

Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.



Listed prices are for one size, medium and large sizes harnesses. For small and X-large, add 5% to the price. For XX-large, add 10%.


# belts

**WAIST BELTS ARE PROHIBITED FOR FALL ARREST.**


## BELTS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Tool belts – 1¾ in. wide</b>			
<b>BD852L</b>	Side-positioning D-rings, tongue and buckle, large	1.3 lbs. (0.6 kg)	<b>\$80.00</b>
<b>Padded belts</b>			
<b>BD952L</b>	Side-positioning D-rings, tongue and buckle, large	1.9 lbs. (0.9 kg)	<b>\$130.80</b>
<b>Miner's belts – 4 in. wide</b>			
<b>BM942L</b>	Miner's tool belt, foam padded, tongue and buckle, back restraint D-ring, straps for batteries, large	1.8 lbs. (0.8 kg)	<b>\$135.70</b>


Available sizes: Small, medium, large, X-large and XX-large. Refer to the belt sizes chart on page 5.



BD852L

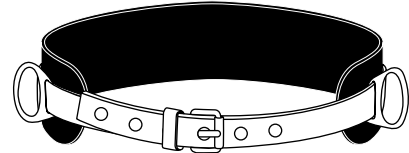

BD952L

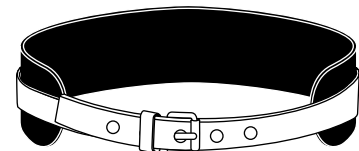

BM942L


height safety / height safety equipment / accessories

# accessories


## ACCESSORIES

PART #	DESCRIPTION	WEIGHT	PRICE
<b>XVEST02*</b>	Tracvest harness vest, orange	1.1 lbs. (0.5 kg)	<b>\$160.70</b>
<b>XSPADW</b>	Shoulder pads for harness (pair)	0.4 lbs. (0.2 kg)	<b>\$16.80</b>
<b>XLPA2W</b>	Leg pads for harness (pair)	0.5 lbs. (0.2 kg)	<b>\$23.80</b>
<b>XW112R1*</b>	15 in. D-ring extender (can be added to any dorsal D-ring)	0.5 lbs. (0.2 kg)	<b>\$25.20</b>
<b>K6FL6A</b>	Suspension loop	0.5 lbs. (0.2 kg)	<b>\$34.10</b>
<b>XB1116</b>	Carrying and storage bag for harness – 11 x 16 in. (28 x 40 cm)	0.2 lbs. (0.1 kg)	<b>\$14.70</b>
<b>XB0820</b>	Carrying bag with handles – 8 x 20 in. (20 x 50 cm)	0.7 lbs. (0.3 kg)	<b>\$35.70</b>
<b>XB2111</b>	Carrying bag – 11 x 11 x 21 in. (28 x 28 x 53 cm)	0.9 lbs. (0.4 kg)	<b>\$49.70</b>
<b>XGRID</b>	Tractel® product grid display		<b>\$245.90</b>
<b>XCUTD</b>	Tractel® dummy cut out display		<b>\$76.50</b>


\*Harness sold separately.




XVEST02



K6FL6A



XGRID



XCUTD

# shock-absorbing lanyards




E4 lanyards with a capacity of 100 to 254 lbs. (45 to 115 kg)

## TRACPAC LIGHTWEIGHT WEB SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C1106Z/E4</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$83.60</b>
<b>C1106H/E4</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$130.00</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$0.60</b>
<b>Two arms</b>			
<b>C1126Z/E4</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hooks all ends	2.8 lbs. (1.3 kg)	<b>\$117.30</b>
<b>C1126H/E4</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at each arm	4 lbs. (1.8 kg)	<b>\$219.90</b>
	Different length - Per foot	0.4 lbs. (0.2 kg)	<b>\$1.10</b>




Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2 or 1.8 m) except adjustable and tie-back models.

## TRACPAC HIGH-ABRASION SHOCK-ABSORBING LANYARDS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C106Z/E4</b> 	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.6 lbs. (1.2 kg)	<b>\$97.30</b>
<b>C106H/E4</b> 	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	3.2 lbs. (1.5 kg)	<b>\$144.80</b>
<b>C196ZZ/E4</b>	6 ft. (1.8 m), adjustable with tie-back and ¾ in. (20 mm) self-locking snap hook both ends	2.7 lbs. (1.2 kg)	<b>\$106.40</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$0.70</b>
<b>Two arms</b>			
<b>C126Z/E4</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hooks all ends	3.5 lbs. (1.6 kg)	<b>\$136.10</b>
<b>C126H/E4</b> 	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	4.7 lbs. (2.1 kg)	<b>\$235.60</b>
<b>C186ZZ/E4</b>	6 ft. (1.8 m), two adjustable arms with tie back and ¾ in. (20 mm) self-locking snap hooks all ends	3.8 lbs. (1.7 kg)	<b>\$150.10</b>
	Different length - Per foot	0.4 lbs. (0.2 kg)	<b>\$1.40</b>

Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2, 1.5 or 1.8 m) except adjustable and tie-back models.


## PHOENIX SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C006K/E4</b> 	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$55.00</b>
<b>C006H/E4</b> 	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$77.00</b>
<b>Two arms</b>			
<b>C026H/E4</b> 	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	4 lbs. (1.8 kg)	<b>\$118.50</b>


Available length: 6 ft. (1.8 m) only.

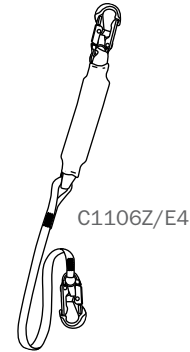

C1106Z/E4

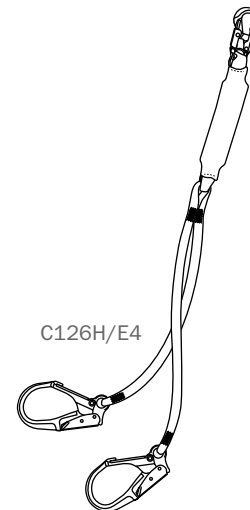

C126H/E4




C006K/E4

# shock-absorbing lanyards


E4 lanyards with a capacity of 100 to 254 lbs. (45 to 115 kg)

## TRACPAC SHOCK ABSORBERS



PART #	DESCRIPTION	WEIGHT	PRICE
<b>C002RZ/E4</b>	18 in. (46 cm) with D-ring and ¾ in. (20 mm) self-locking snap hook	1.2 lbs. (0.5 kg)	<b>\$58.30</b>
<b>C002Z/E4</b>	24 in. (60 cm) with ¾ in. (20 mm) self-locking snap hooks	1.7 lbs. (0.8 kg)	<b>\$70.70</b>
<b>C002K/1E4</b>	30 in. (76 cm) with ¾ in. (20 mm) self-locking snap hooks	1.7 lbs. (0.8 kg)	<b>\$65.60</b>



## TRACPAC EXTENDIBLE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C206Z/E4</b>	4½ to 6 ft. (1.4 to 1.8 m) extendible lanyard with shock absorber, ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$116.60</b>
<b>C206H/E4</b>	4½ to 6 ft. (1.4 to 1.8 m) extendible lanyard with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$164.60</b>
<b>Two arms</b>			
<b>C226H/E4</b> 	4½ to 6 ft. (1.4 to 1.8 m) two-arm extendible lanyard with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arms	4.2 lbs. (1.9 kg)	<b>\$250.40</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

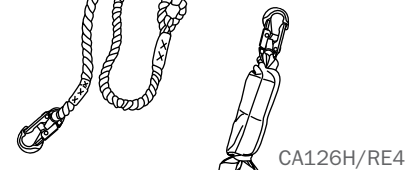

## TRACPAC ROPE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C806Z/E4</b>	6 ft. x ¾ in. (1.8 m x 16.3 mm) rope lanyard with ¾ in. (20 mm) self-locking snap hook both ends	2.1 lbs. (1 kg)	<b>\$122.80</b>
<b>C806H/E4</b>	6 ft. x ¾ in. (1.8 m x 16.3 mm) rope lanyard, with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.7 lbs. (1.2 kg)	<b>\$160.90</b>

Available lengths: 4 or 6 ft. (1.2 or 1.8 m) only.

## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA126H/RE4</b>	6 ft. (1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.6 lbs. (3 kg)	<b>\$251.30</b>

Available length: 6 ft. (1.8 m) only.

## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA226H/RE4</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.5 lbs. (2.9 kg)	<b>\$268.10</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

CA226H/RE4

# shock-absorbing lanyards

E4 lanyards with a capacity of 100 to 254 lbs. (45 to 115 kg)

## STRETCHFOR SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C506Z/E4</b>	4½ to 6 ft. (1.4 to 1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.2 lbs. (1 kg)	<b>\$82.20</b>
<b>C506H/E4</b>	4½ to 6 ft. (1.4 to 1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.8 lbs. (1.3 kg)	<b>\$107.50</b>
<b>Two arms</b>			
<b>C526H/E4</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5 lbs. (2.3 kg)	<b>\$177.10</b>
<b>C526Y/E4</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2½ in. (63 mm) aluminum self-locking snap hooks at the arms	5.4 lbs. (2.4 kg)	<b>\$224.30</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

## STRETCHFOR RESCUE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>C526H/RE4</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5.3 lbs. (2.4 kg)	<b>\$188.60</b>
<b>C526Y/RE4</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2½ in. (63 mm) aluminum self-locking snap hooks at the arms	6.5 lbs. (2.9 kg)	<b>\$241.70</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

## EXTENDFOR SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C706Z/E4</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.2 lbs. (1 kg)	<b>\$69.10</b>
<b>C706H/E4</b>	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.8 lbs. (1.3 kg)	<b>\$113.90</b>
<b>Two arms</b>			
<b>C726H/E4</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5 lbs. (2.3 kg)	<b>\$200.50</b>

Available length: 4 or 6 ft. (1.2 or 1.8 m) only.


## WIRE ROPE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C0K306Z/E4</b>	6 ft. (1.8 m) with ¾ in. (6.5 mm) vinyl covered wire rope, Kevlar® covered shock absorber and ¾ in. (20 mm) self-locking snap hook both ends	2.5 lbs. (1.1 kg)	<b>\$126.80</b>
<b>Two arms</b>			
<b>C0K326Z/E4</b>	6 ft. (1.8 m), two arms with ¾ in. (6.5 mm) vinyl covered wire rope, Kevlar® covered shock absorber and ¾ in. (20 mm) self-locking snap hook all ends	4.5 lbs. (2 kg)	<b>\$197.10</b>

Available length: 6 ft. (1.8 m) only.




C506Z/E4

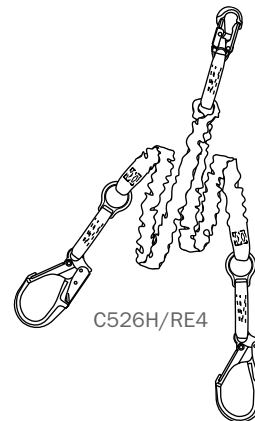

C526H/RE4



C726H/E4

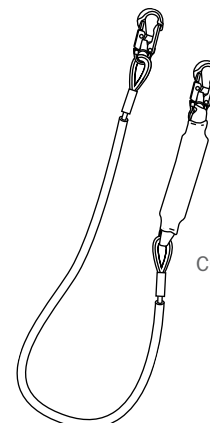




C0K306Z/E4

# shock-absorbing lanyards


E6 lanyards with a capacity of 200 to 386 lbs. (90 to 175 kg)

TRACPAC LIGHTWEIGHT WEB SHOCK-ABSORBING LANYARDS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C1106Z/E6</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$89.10</b>
<b>C1106H/E6</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$135.40</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$0.60</b>
<b>Two arms</b>			
<b>C1126Z/E6</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hooks all ends	2.8 lbs. (1.3 kg)	<b>\$122.80</b>
<b>C1126H/E6</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at each arm	4 lbs. (1.8 kg)	<b>\$225.40</b>
	Different length - Per foot	0.4 lbs. (0.2 kg)	<b>\$1.10</b>


Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2 or 1.8 m) except adjustable and tie-back models.

TRACPAC HIGH-ABRASION SHOCK-ABSORBING LANYARDS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C106Z/E6</b> 	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.6 lbs. (1.2 kg)	<b>\$102.80</b>
<b>C106H/E6</b> 	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	3.2 lbs. (1.5 kg)	<b>\$150.40</b>
<b>C196ZZ/E6</b>	6 ft. (1.8 m), adjustable with tie-back and ¾ in. (20 mm) self-locking snap hook both ends	2.7 lbs. (1.2 kg)	<b>\$113.20</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$0.70</b>
<b>Two arms</b>			
<b>C126Z/E6</b>	6 ft. (1.8 m), two arms with ¾ in. (20 mm) self-locking snap hooks all ends	3.5 lbs. (1.6 kg)	<b>\$141.50</b>
<b>C126H/E6</b> 	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	4.7 lbs. (2.1 kg)	<b>\$241.10</b>
<b>C186ZZ/E6</b>	6 ft. (1.8 m), two adjustable arms with tie back and ¾ in. (20 mm) self-locking snap hooks all ends	3.8 lbs. (1.7 kg)	<b>\$155.50</b>
	Different length - Per foot	0.4 lbs. (0.2 kg)	<b>\$1.40</b>


Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2, 1.5 or 1.8 m) except adjustable and tie-back models.

PHOENIX SHOCK-ABSORBING LANYARDS 			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C006K/E6</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$61.00</b>
<b>C006H/E6</b>	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$84.10</b>
<b>Two arms</b>			
<b>C026H/E6</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	4 lbs. (1.8 kg)	<b>\$124.00</b>


Available length: 6 ft. (1.8 m) only.

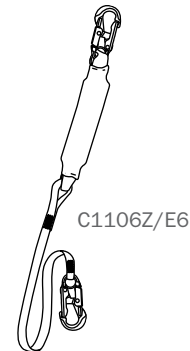

C1106Z/E6

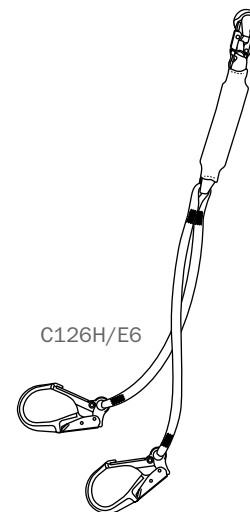

C126H/E6




C006K/E6

# shock-absorbing lanyards


E6 lanyards with a capacity of 200 to 386 lbs. (90 to 175 kg)

## TRACPAC SHOCK ABSORBERS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>C002RZ/E6</b>	18 in. (46 cm) with D-ring and ¾ in. (20 mm) self-locking snap hook	1.2 lbs. (0.5 kg)	<b>\$64.30</b>
<b>C002Z/E6</b>	24 in. (60 cm) with ¾ in. (20 mm) self-locking snap hooks	1.7 lbs. (0.8 kg)	<b>\$78.30</b>
<b>C002K/1E6</b>	30 in. (76 cm) with ¾ in. (20 mm) self-locking snap hooks	1.7 lbs. (0.8 kg)	<b>\$71.60</b>



## TRACPAC EXTENDIBLE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C206Z/E6</b>	4½ to 6 ft. (1.4 to 1.8 m) extendible lanyard with shock absorber, ¾ in. (20 mm) self-locking snap hook both ends	2 lbs. (0.9 kg)	<b>\$122.10</b>
<b>C206H/E6</b>	4½ to 6 ft. (1.4 to 1.8 m) extendible lanyard with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.6 lbs. (1.2 kg)	<b>\$170.20</b>
<b>Two arms</b>			
<b>C226H/E6</b> 	4½ to 6 ft. (1.4 to 1.8 m) two-arm extendible lanyard with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arms	4.2 lbs. (1.9 kg)	<b>\$256.00</b>


Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.



## TRACPAC ROPE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C806Z/E6</b>	6 ft. x ⅝ in. (1.8 m x 16.3 mm) rope lanyard with ¾ in. (20 mm) self-locking snap hook both ends	2.1 lbs. (1 kg)	<b>\$128.20</b>
<b>C806H/E6</b>	6 ft. x ⅝ in. (1.8 m x 16.3 mm) rope lanyard, with ¾ in. (20 mm) self-locking snap hook at shock pack end and 2¼ in. (57 mm) at the arm	2.7 lbs. (1.2 kg)	<b>\$166.30</b>

Available lengths: 4 or 6 ft. (1.2 or 1.8 m) only.

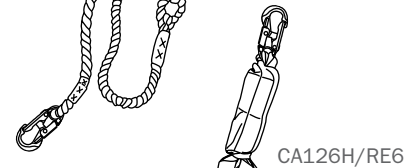

## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA126H/RE6</b>	6 ft. (1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.6 lbs. (3 kg)	<b>\$261.40</b>

Available length: 6 ft. (1.8 m) only.

## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA226H/RE6</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.5 lbs. (2.9 kg)	<b>\$278.20</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.



# shock-absorbing lanyards

E6 lanyards with a capacity of 200 to 386 lbs. (90 to 175 kg)

## STRETCHFOR SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C506Z/E6</b>	4½ to 6 ft. (1.4 to 1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.2 lbs. (1 kg)	<b>\$87.80</b>
<b>C506H/E6</b>	4½ to 6 ft. (1.4 to 1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.8 lbs. (1.3 kg)	<b>\$113.10</b>
<b>Two arms</b>			
<b>C526H/E6</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5 lbs. (2.3 kg)	<b>\$182.60</b>
<b>C526Y/E6</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2½ in. (63 mm) aluminum self-locking snap hooks at the arms	5.4 lbs. (2.4 kg)	<b>\$229.80</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

## STRETCHFOR RESCUE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>C526H/RE6</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5.3 lbs. (2.4 kg)	<b>\$194.20</b>
<b>C526Y/RE6</b>	4½ to 6 ft. (1.4 to 1.8 m), two arms with rescue rings, a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2½ in. (63 mm) aluminum self-locking snap hooks at the arms	6.5 lbs. (2.9 kg)	<b>\$247.30</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

## EXTENDFOR SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C706Z/E6</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	2.2 lbs. (1 kg)	<b>\$74.70</b>
<b>C706H/E6</b>	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.8 lbs. (1.3 kg)	<b>\$119.40</b>
<b>Two arms</b>			
<b>C726H/E6</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5 lbs. (2.3 kg)	<b>\$206.10</b>


Available length: 4 or 6 ft. (1.2 or 1.8 m) only.

## WIRE ROPE SHOCK-ABSORBING LANYARDS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C0K306Z/E6</b>	6 ft. (1.8 m) with ¾ in. (6.5 mm) vinyl covered wire rope, Kevlar® covered shock absorber and ¾ in. (20 mm) self-locking snap hook both ends	2.5 lbs. (1.1 kg)	<b>\$134.60</b>
<b>Two arms</b>			
<b>C0K326Z/E6</b>	6 ft. (1.8 m), two arms with ¾ in. (6.5 mm) vinyl covered wire rope, Kevlar® covered shock absorber and ¾ in. (20 mm) self-locking snap hook all ends	4.5 lbs. (2 kg)	<b>\$199.60</b>

Available length: 6 ft. (1.8 m) only.

C506Z/E6




C526H/RE6

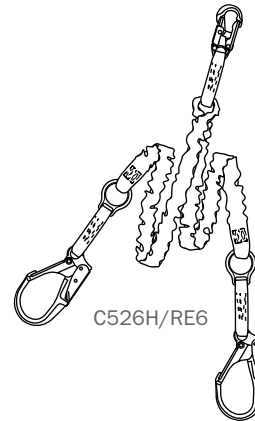

C726H/E6



C0K306Z/E6

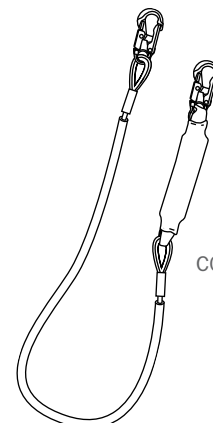


# work-positioning lanyards

## HIGH-ABRASION WEB LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>C606Z</b>	6 ft. (1.8 m) with ¾ in. (20 mm) self-locking snap hook both ends	1.7 lbs. (0.8 kg)	<b>\$54.60</b>
<b>C606H</b>	6 ft. (1.8 m) with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arm	2.3 lbs. (1 kg)	<b>\$78.20</b>
<b>C696Z</b>	6 ft. (1.8 m), adjustable with ¾ in. (20 mm) self-locking snap hook both ends	1.9 lbs. (0.9 kg)	<b>\$78.40</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$0.70</b>

Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2, 1.5 or 1.8 m) except adjustable models.



## ROPE LANYARDS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>C406Z</b>	6 ft. x ¾ in. (1.8 m x 16.3 mm) rope lanyard with ¾ in. (20 mm) self-locking snap hook both ends	2.1 lbs. (1 kg)	<b>\$69.30</b>
<b>C496Z</b>	6 ft. x ¾ in. (1.8 m x 16.3 mm) adjustable rope lanyard with ¾ in. (20 mm) self-locking snap hook both ends	2.2 lbs. (1 kg)	<b>\$77.50</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$1.80</b>

Available lengths: 3, 4 or 6 ft. (0.9, 1.2 or 1.8 m) except adjustable models.

## VINYL COVERED WIRE ROPE LANYARD

PART #	DESCRIPTION	WEIGHT	PRICE
<b>C906Z</b>	6 ft. (1.8 m) with 7 x 19 galvanized aircraft cable and ¾ in. (20 mm) self-locking snap hook both ends	2.1 lbs. (1 kg)	<b>\$84.60</b>
	Different length - Per foot	0.2 lbs. (0.1 kg)	<b>\$1.30</b>

Available lengths: 3, 4, 5 or 6 ft. (0.9, 1.2, 1.5 or 1.8 m)





height safety / height safety equipment / positioning lanyards

# work-positioning assemblies

## WORK-POSITIONING ASSEMBLIES


CODE	DESCRIPTION	POIDS	PRIX
<b>CSP06C1</b>	6 ft. x ½ in. Adjustfor work-positioning rope lanyard	2.2 lb (1 kg)	<b>\$206.20</b>
<b>V61WH</b>	Rebar chain assembly with ¾ in. (20 mm) self-locking snap hook both ends, swivel link and 2¼ in. (57 mm) self-locking snap hook (overall length 27 in. [686 mm])	3.8 lb (1.7 kg)	<b>\$111.00</b>




# connectors for lanyards

All lanyards that meet ANSI A10.32-2012 and Z359.12-2009 come standard with a ¾ in. (20 mm) forged steel self-locking snap hook (#43601 – Z) at each end. Choose your connector in the list below by changing the last letter of the lanyard product code by the one in brackets.  
All hooks and carabiners comply with the 3,600 lbs. (16 kN) gate strength requirement.


CONNECTORS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>Self-locking snap hooks</b>			
<b>43601 (Z)</b>	¾ in. (20 mm) forged steel self-locking snap hook, 5,000 lbs. (22.2 kN)	0.8 lbs. (0.4 kg)	<b>\$21.70</b>
<b>44651Z (V)</b>	¾ in. (22 mm) forged steel self-locking swivel snap hook with visual fall indicator	1.1 lbs. (0.5 kg)	<b>\$55.40</b>
<b>43615 (H)</b>	2¼ in. (57 mm) forged steel self-locking snap hook 5,000 lbs. (22.2 kN)	1.7 lbs. (0.8 kg)	<b>\$78.90</b>
<b>45271 (Y)</b>	2½ in. (64 mm) forged aluminum self-locking snap hook 5,000 lbs. (22.2 kN)	1.5 lbs. (0.7 kg)	<b>\$91.90</b>
<b>Carabiners</b>			
<b>PM11Z (C1)</b>	¾ in. (16 mm) alloy steel autolocking carabiner, 5,000 lbs. (22.2 kN)	0.4 lbs. (0.2 kg)	<b>\$36.80</b>
<b>P2854Z</b>	1½ in. (24 mm) anodized aluminum autolocking carabiner, 5,620 lbs. (25 kN) with captive eye pin		<b>\$43.60</b>
<b>P202Z (T1)</b>	1 in. (26 mm) alloy steel autolocking carabiner, 11,200 lbs. (50 kN) with captive eye pin	0.9 lbs. (0.4 kg)	<b>\$41.70</b>
<b>P307Z (T)</b>	2 in. (50 mm) alloy steel autolocking carabiner, 9,000 lbs. (40 kN) with captive eye pin	0.9 lbs. (0.4 kg)	<b>\$91.30</b>
<b>P2868Z (C6)</b>	2 in. (53 mm) anodized aluminum pear shape autolocking carabiner, 5,620 lbs. (25 kN) with captive eye pin	1 lbs. (0.5 kg)	<b>\$149.90</b>
<b>P407Z (TT)</b>	2 in. (53 mm) alloy steel pear shape autolocking carabiner, 7,200 lbs. (32 kN) with captive eye pin	1.5 lbs. (0.7 kg)	<b>\$122.90</b>




43601 (Z)



44651Z (V)



43615 (H)




45271 (Y)




PM11Z (C1)




P2854Z




P202Z (T1)



P307Z (T)



P2868Z (C6)





P407Z (TT)

# fall protection kits

## FALL PROTECTION KITS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>Aerial lift kit</b>			
<ul style="list-style-type: none"> <li>One size Phoenix harness</li> <li>Sewn shock-absorbing lanyard</li> <li>Storage bag (XB1116)</li> </ul>			
<b>EAC04K/E4</b>	4 ft. (1.2 m) system – E4	3.4 lbs. (1.5 kg)	<b>\$121.50</b>
<b>EAC04K/E6</b>	4 ft. (1.2 m) system – E6	3.4 lbs. (1.5 kg)	<b>\$127.00</b>
<b>EAC06K/E4</b>	6 ft. (1.8 m) system – E4	3.6 lbs. (1.6 kg)	<b>\$122.50</b>
<b>EAC06K/E6</b>	6 ft. (1.8 m) system – E6	3.6 lbs. (1.6 kg)	<b>\$127.90</b>
<b>Basic fall protection kit</b>			
<ul style="list-style-type: none"> <li>Phoenix T5 harness</li> <li>6 ft. (1.8 m) shock-absorbing lanyard with ¾ in. (20 mm) self-locking snap hooks (C006K/E4 or C006K/E6)</li> <li>Storage bag (XB1116)</li> </ul>			
<b>KITC-B01K/E4</b>	Basic fall protection kit – E4	5 lbs. (2.3 kg)	<b>\$135.70</b>
<b>KITC-B01K/E6</b>	Basic fall protection kit – E6	5 lbs. (2.3 kg)	<b>\$140.90</b>



# tower climber's kits

## TOWER CLIMBER'S KITS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Basic kit</b>			
<ul style="list-style-type: none"> <li>▪ TowerPro harness (FBD_)</li> <li>▪ Tie-back lanyard (C186ZZ/E4)</li> <li>▪ Adjustfor work-positioning lanyard (CSP06C1)</li> <li>▪ Helmet (K3A16)</li> <li>▪ Tractel® gear bag (XB2111)</li> </ul>			
<b>KITC-TCBZM/E4</b>	Ensemble de base pour monteur de tour, harnais moyen – E4	18 lbs. (8.2 kg)	<b>\$1,063.00</b>
<b>KITC-TCBZM/E6</b>	Ensemble de base pour monteur de tour, harnais moyen – E6	18 lbs. (8.2 kg)	<b>\$1,069.00</b>
<b>KITC-TCBZL/E4</b>	Ensemble de base pour monteur de tour, grand harnais – E4	18 lbs. (8.2 kg)	<b>\$1,063.00</b>
<b>KITC-TCBZL/E6</b>	Ensemble de base pour monteur de tour, grand harnais – E6	18 lbs. (8.2 kg)	<b>\$1,069.00</b>
<b>KITC-TCBZXL/E4</b>	Ensemble de base pour monteur de tour, très grand harnais – E4	18 lbs. (8.2 kg)	<b>\$1,086.00</b>
<b>KITC-TCBZXL/E6</b>	Ensemble de base pour monteur de tour, très grand harnais – E6	18 lbs. (8.2 kg)	<b>\$1,092.00</b>
<b>Deluxe kit</b>			
<ul style="list-style-type: none"> <li>▪ TowerPro harness (FBD_)</li> <li>▪ Pro-Seat saddle (XSAD1)</li> <li>▪ Tie-back lanyard (C186ZZ/E4)</li> <li>▪ Adjustfor work-positioning lanyard (CSP06C1)</li> <li>▪ 5/8 in. (16 mm) stopfor® A rope grab (WA58)</li> <li>▪ Quick-draw lanyard (CL02Z)</li> <li>▪ 5/16 in. (8.4 mm) wire rope grab with carabiner (LT516)</li> <li>▪ Helmet (K3A16)</li> <li>▪ Tractel® gear bag (XB2111)</li> </ul>			
<b>KITC-TCDZM/E4</b>	Deluxe Tower climber's kit, medium harness – E4	25 lbs. (11.3 kg)	<b>\$1,767.00</b>
<b>KITC-TCDZM/E6</b>	Deluxe Tower climber's kit, medium harness – E6	25 lbs. (11.3 kg)	<b>\$1,774.00</b>
<b>KITC-TCDZL/E4</b>	Deluxe Tower climber's kit, large harness – E4	25 lbs. (11.3 kg)	<b>\$1,767.00</b>
<b>KITC-TCDZL/E6</b>	Deluxe Tower climber's kit, large harness – E6	25 lbs. (11.3 kg)	<b>\$1,774.00</b>
<b>KITC-TCDZXL/E4</b>	Deluxe Tower climber's kit, X-large harness – E4	25 lbs. (11.3 kg)	<b>\$1,790.00</b>
<b>KITC-TCDZXL/E6</b>	Deluxe Tower climber's kit, X-large harness – E6	25 lbs. (11.3 kg)	<b>\$1,795.00</b>

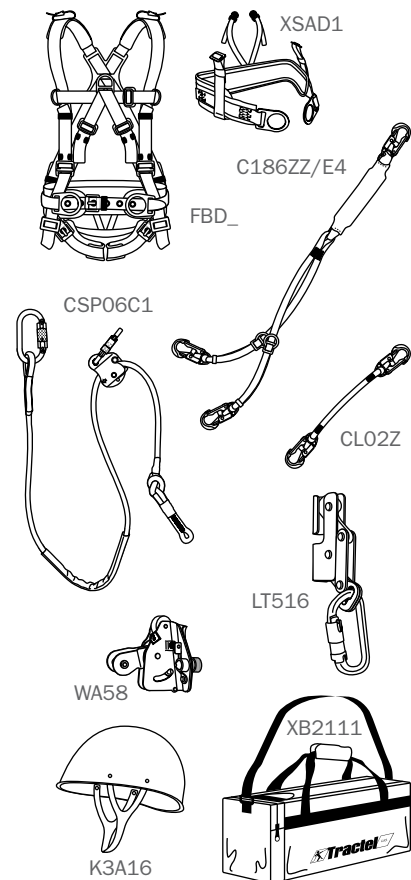


# quik-mount®

## roofing system

### QUIK-MOUNT® KIT

PART #	DESCRIPTION	WEIGHT	PRICE
<ul style="list-style-type: none"> <li>▪ Phoenix T5 harness</li> <li>▪ stopfor® B rope grab (WB58)</li> <li>▪ 30 in. (0.75 m) shock-absorbing lanyard (E4 or E6)</li> <li>▪ 25 ft. (7.6 m) Superline lifeline</li> <li>▪ One reusable roof anchor with screws</li> <li>▪ Pail</li> </ul>			
<b>N0925K/E4</b>	25 ft. (7.6 m) quik-Mount® kit - E4	10.3 lbs. (4.7 kg)	<b>\$271.90</b>
<b>N0950K/E4</b>	50 ft. (15 m) quik-Mount® kit - E4	12.5 lbs. (5.7 kg)	<b>\$293.30</b>
<b>N0925K/E6</b>	25 ft. (7.6 m) quik-Mount® kit - E6	10.3 lbs. (4.7 kg)	<b>\$277.40</b>
<b>N0950K/E6</b>	50 ft. (15 m) quik-Mount® kit - E6		<b>\$298.80</b>

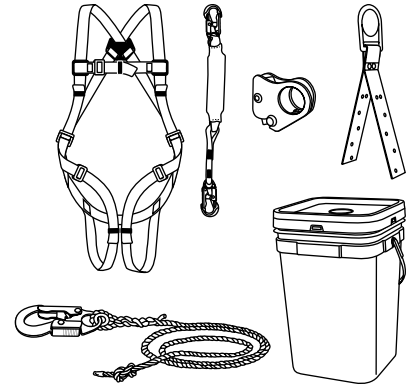



height safety / height safety equipment / roof anchors

## accessories

### for quik-mount® roofing system

### ACCESSORIES FOR QUIK-MOUNT® ROOFING SYSTEM


PART #	DESCRIPTION	WEIGHT	PRICE
<b>Superline lifeline with ¾ in. (20 mm) steel self-locking snap hook</b>			
<b>GS25NK</b>	25 ft. (7.6 m) lifeline	3.4 lbs. (1.5 kg)	<b>\$68.30</b>
<b>GS50NK</b>	50 ft. (15 m) lifeline	6.0 lbs. (2.7 kg)	<b>\$90.20</b>
<b>GS100NK</b>	100 ft. (30 m) lifeline	11.2 lbs. (5.1 kg)	<b>\$134.00</b>
<b>Accessories</b>			
<b>N105B</b>	Box of 5 reusable peak roofing anchors with screws	8.2 lbs. (3.7 kg)	<b>\$118.70</b>
<b>428104S</b>	Reusable flat roofing anchors with screws (Packaged in bags of 5 units at \$28.70 each)	12.5 lbs. (5.7 kg)	<b>\$143.50</b>
<b>428103S</b>	Heavy-duty hinged D-ring roof anchor with screws	2.5 lbs. (1.1 kg)	<b>\$47.10</b>
<b>49SCREWD</b>	Bag of 12 screws	0.2 lbs. (0.1 kg)	<b>\$10.10</b>
<b>XB0820</b>	Carrying bag with handles - 8 x 20 in. (203 x 508 mm)	0.7 lbs. (0.3 kg)	<b>\$35.70</b>




# roof anchors

ROOF ANCHORS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>Screw-down roof anchor with appropriate connection hardware</b>			
<b>N620*</b>	Screw-down roof anchor	11.5 lbs. (5.2 kg)	<b>\$319.10</b>
<b>N620/3</b>	Screw-down roof anchor with 30 ft. (9 m) blocfor® AES Leading Edge self-retracting lifeline	23.9 lbs. (10.8 kg)	<b>\$911.10</b>
<b>N620/5</b>	Screw-down roof anchor with 50 ft. (15 m) blocfor® Leading Edge self-retracting lifeline	31.5 lbs. (14.3 kg)	<b>\$1,106.00</b>
<b>Adjustable/swivel ridge anchor with appropriate connection hardware</b>			
<b>N630*</b>	Adjustable/swivel ridge anchor	9.9 lbs. (4.5 kg)	<b>\$449.80</b>
<b>N630/3</b>	Adjustable/swivel ridge anchor with 30 ft. (9 m) blocfor® AES Leading Edge self-retracting lifeline	22.3 lbs. (10.1 kg)	<b>\$1,040.00</b>
<b>N630/5</b>	Adjustable/swivel ridge anchor with 50 ft. (15 m) blocfor® Leading Edge self-retracting lifeline	29.9 lbs. (13.6 kg)	<b>\$1,235.00</b>
<b>Flat metal roof anchor with appropriate connection hardware</b>			
<b>N640*</b>	Flat metal roof anchor	16.8 lbs. (7.6 kg)	<b>\$345.30</b>
<b>N640/3</b>	Flat metal roof anchor with 30 ft. (9 m) blocfor® AES Leading Edge self-retracting lifeline	29.2 lbs. (13.2 kg)	<b>\$936.90</b>
<b>N640/5</b>	Flat metal roof anchor with 50 ft. (15 m) blocfor® Leading Edge self-retracting lifeline	36.8 lbs. (16.7 kg)	<b>\$1,132.00</b>
<b>Standing seam roof clamp with appropriate connection hardware</b>			
<b>N650*</b>	Standing seam roof clamp	29.0 lbs. (13.2 kg)	<b>\$616.30</b>
<b>N650/3</b>	Standing seam roof clamp 30 ft. (9 m) blocfor® AES Leading Edge self-retracting lifeline	41.4 lbs. (18.8 kg)	<b>\$1,180.00</b>
<b>N650/5</b>	Standing seam roof clamp with 50 ft. (15 m) blocfor® Leading Edge self-retracting lifeline	49.0 lbs. (22.2 kg)	<b>\$1,372.00</b>


\*Does not include self-retracting lifeline.

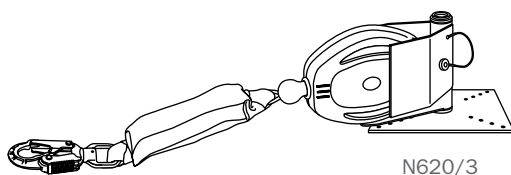


N620/3

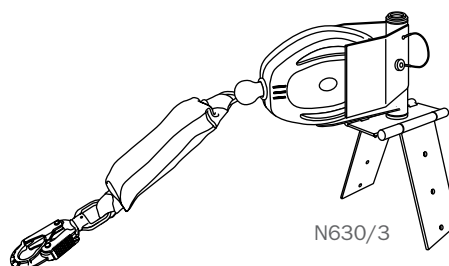

N630/3

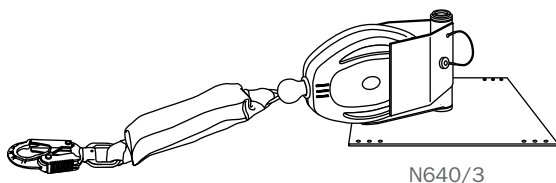


N640/3

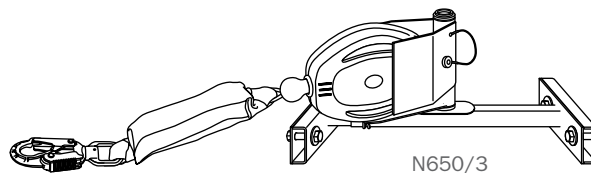


N650/3

# hard anchorage connectors


HARD ANCHORAGE CONNECTORS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>V5009</b>	Beam clamp – Beam width: 3 to 9¼ in. (76 to 235 mm)	10.6 lbs. (4.8 kg)	<b>\$191.70</b>
<b>V5019</b>	Beam trolley – Beam width: 2.3 to 8.7 in. (58 to 220 mm)	31 lbs. (14.1 kg)	<b>\$313.80</b>
<b>V5002</b>	BeamSlide sliding beam anchor, beam width of 4 to 14 in. (100 to 355 mm) – thickness of 1½ in. (38 mm)	5.3 lbs. (2.4 kg)	<b>\$427.40</b>
<b>V3731</b>	Anchorage D-ring, ½ in. (13 mm) hole. Includes nut and bolt	0.7 lbs. (0.3 kg)	<b>\$65.30</b>
<b>V4232</b>	Anchorage D-ring – clearance hole for ½ in. (13 mm) bolt	1 lbs. (0.5 kg)	<b>\$55.70</b>
<b>V4238</b>	Anchorage D-ring – clearance hole for ¾ in. (16 mm) bolt	1 lbs. (0.5 kg)	<b>\$55.70</b>
<b>V62217</b>	Door anchor bar – Up to 43 in. (1.1 m) wide	25 lbs. (11.3 kg)	<b>\$1,144.00</b>
<b>V42PAWFP</b>	Portable AnCore wedge fall protection reusable concrete anchor connector, MBS 5,000 lbs. (22.2 kN)	0.5 lbs. (0.2 kg)	<b>\$179.70</b>
<b>V42PAWFP2</b>	Portable AnCore wedge fall protection reusable concrete anchor connector, MBS 10,000 lbs. (44.4 kN)	1.2 lbs. (0.5 kg)	<b>\$359.60</b>
<b>V42PALFP</b>	Portable AnCore lock fall protection reusable concrete and steel anchor connector, MBS 5,000 lbs. (22.2 kN)	0.7 lbs. (0.3 kg)	<b>\$208.70</b>
<b>V42PAWCI1K</b>	Portable AnCore wedge construction or industrial reusable concrete anchor connector, MBS 5,000 lbs. (22.2 kN)	0.5 lbs. (0.2 kg)	<b>\$179.70</b>
<b>V42PAWCI2K</b>	Portable AnCore wedge construction or industrial reusable concrete anchor connector, MBS 10,000 lbs. (44.4 kN)	1.2 lbs. (0.5 kg)	<b>\$359.60</b>
<b>V1820</b>	Complete first-man remote hook with fiberglass pole – Extends from 8 to 20 ft. (2.4 to 6 m)	8.8 lbs. (4 kg)	<b>\$641.90</b>
<b>V148C</b>	Fiberglass pole with carabiner – Extends from 4 to 8 ft. (1.2 to 2.4 m)	3.3 lbs. (1.5 kg)	<b>\$430.80</b>




V5009



V5019



V5002




V3731




V4232

NO hardware supplied

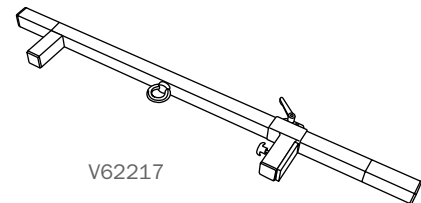

V62217



V4260C1



V42PAWFP



V42PAWFP2



V42PALFP




V1820



V148C

# soft anchorage connectors

SOFT ANCHORAGE CONNECTOR			
PART #	DESCRIPTION	WEIGHT	PRICE
V4136	15 in. (0.4 m) anchor sling	0.8 lbs. (0.4 kg)	<b>\$51.00</b>
V4135	3 ft. (0.9 m) anchor sling	1.2 lbs. (0.5 kg)	<b>\$59.30</b>
V4165	6 ft. (1.8 m) anchor sling	1.8 lbs. (0.8 kg)	<b>\$67.10</b>
V4006	6 ft. (1.8 m) anchor choker and one D-ring	0.6 lbs. (0.3 kg)	<b>\$23.70</b>
V4016	6 ft. (1.8 m) anchor sling with two D-rings	0.9 lbs. (0.4 kg)	<b>\$30.50</b>
V4115	15 in. (0.4 m) sling choker (use only on 3 in. [76 mm] max. diameter tubing)	0.4 lbs. (0.2 kg)	<b>\$28.20</b>
V8204	4 ft. (1.2 m) concrete anchor strap with protective sleeve (Packaged in bags of 25 units at \$9.10 each)	6.3 lbs. (2.8 kg)	<b>\$227.50</b>
V8206	6 ft. (1.8 m) concrete anchor strap with protective sleeve (Packaged in bags of 25 units at \$10.30 each)	7.5 lbs. (3.4 kg)	<b>\$257.50</b>
V8234	4 ft. (1.2 m) concrete anchor strap with protective sleeve and D-ring (Packaged in bags of 25 units at \$11.40 each)	8.8 lbs. (4 kg)	<b>\$285.00</b>
V8236	6 ft. (1.8 m) concrete anchor strap with protective sleeve and D-ring (Packaged in bags of 25 units at \$12.60 each)	10 lbs. (4.5 kg)	<b>\$315.00</b>
V8304	4 ft. (1.2 m) anchor strap for wrapping around a structural member (Packaged in bags of 25 units at \$7.80 each)	3.8 lbs. (1.7 kg)	<b>\$195.00</b>
V8314	4 ft. (1.2 m) anchor strap with one loop and one D-ring for wrapping around a structural member (Packaged in bags of 25 units at \$9.90 each)	8.8 lbs. (4 kg)	<b>\$247.50</b>
V4173	6 ft. x ¼ in. (1.8 m x 6.5 mm) vinyl covered wire rope sling	2.0 lbs. (0.9 kg)	<b>\$44.50</b>
V41906Z	6 ft. x ¼ in. (1.8 m x 6.5 mm) vinyl covered wire rope sling with ¾ in. (20 mm) self-locking snap hook and O-ring	2.7 lbs. (1.2 kg)	<b>\$86.20</b>
V419060	6 ft. x ¼ in. (1.8 m x 6.5 mm) vinyl covered wire rope sling with O-rings	2.3 lbs. (1 kg)	<b>\$83.60</b>
V41321	18 in. (0.5 m) endless sling	0.2 lbs. (0.1 kg)	<b>\$20.90</b>
V41323	3 ft. (0.9 m) endless sling	0.2 lbs. (0.1 kg)	<b>\$25.30</b>
V41326	6 ft. (1.8 m) endless sling	0.4 lbs. (0.2 kg)	<b>\$31.80</b>

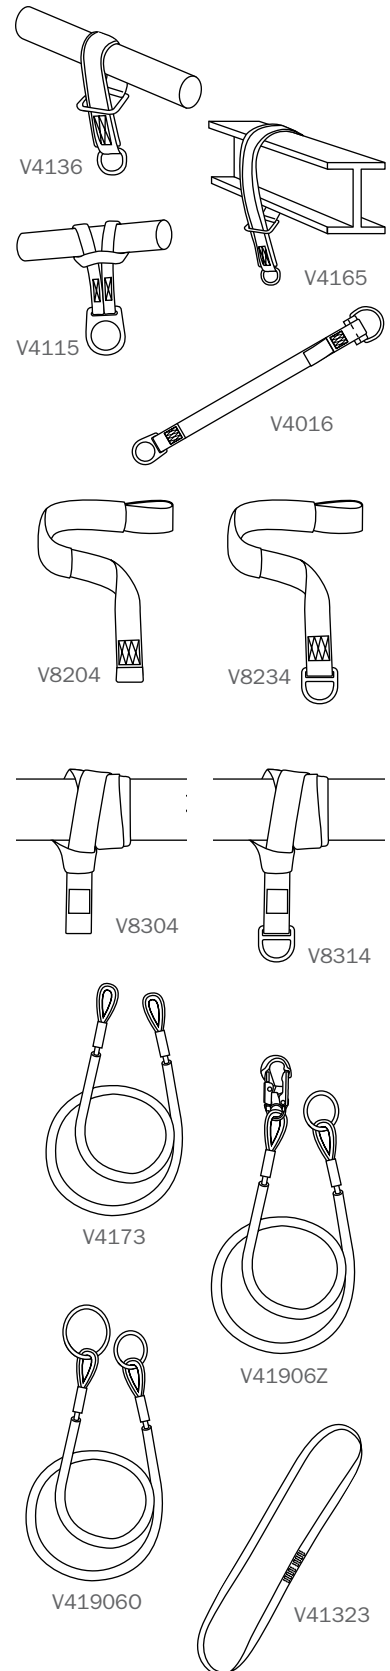


# rope grabs

## rope grabs


### STOPFOR® B ROPE GRABS – 5/8 IN. (16 MM) THREE-STRAND ROPE

PART #	DESCRIPTION	WEIGHT	PRICE
<b>WB58</b>	5/8 in. (16 mm) stopfor® B rope grab	0.8 lbs. (0.4 kg)	<b>\$121.80</b>
<b>WB58P</b>	5/8 in. (16 mm) stopfor® B rope grab with park feature	0.8 lbs. (0.4 kg)	<b>\$130.40</b>


Tractel® recommends to use a lanyard with a maximum length of 3 ft. (0.9 m) to limit free fall distance.



WB58



WB58P



LT516

### WIRE ROPE GRABS – 5/16 IN. (8.4 MM) WIRE ROPE

PART #	DESCRIPTION	WEIGHT	PRICE
<b>LT516</b>	5/16 in. (8.4 mm) wire rope grab with carabiner	1.8 lbs. (0.8 kg)	<b>\$271.30</b>
<b>D51612Z/E4</b>	5/16 in. (8.4 mm) wire rope grab with 2 ft. (0.6 m) shock absorber carabiner and 3/4 in. (20 mm) self-locking snap hook	3.4 lbs. (1.5 kg)	<b>\$328.30</b>

height safety / height safety equipment / lifelines

# kernmantle lifelines

### KERNMANTLE LIFELINES

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Kernmantle lifelines with nylon thimble</b>			
<b>G70716</b>	7/16 in. (11 mm) Kernmantle lifeline Breaking strength: 8,000 lbs. (35.6 kN) – Per foot	0.1 lbs. (0.1 kg)	<b>\$3.00</b>
<b>G16K5N</b>	G70716 with nylon thimble	0.3 lbs. (0.1 kg)	<b>\$33.70</b>
<b>G16K5NK</b>	G70716 with nylon thimble, 3/4 in. (20 mm) self-locking snap hook	0.9 lbs. (0.4 kg)	<b>\$44.10</b>
<b>G16K5NH</b>	G70716 with nylon thimble, 2 1/4 in. (57 mm) self-locking snap hook	1.4 lbs. (0.6 kg)	<b>\$66.50</b>
<b>G16K100N</b>	100 ft. (30 m) of 7/16 in. (11 mm) Kernmantle lifeline	10 lbs. (4.5 kg)	<b>\$328.10</b>
<b>G16K200N</b>	200 ft. (60 m) of 7/16 in. (11 mm) Kernmantle lifeline	20 lbs. (9.1 kg)	<b>\$619.50</b>
<b>G16K300N</b>	300 ft. (90 m) of 7/16 in. (11 mm) Kernmantle lifeline	30 lbs. (13.6 kg)	<b>\$911.10</b>
<b>G7012</b>	1/2 in. (13 mm) Kernmantle lifeline Breaking strength: 10,000 lbs. (44.4 kN) – Per foot	0.1 lbs. (0.1 kg)	<b>\$3.10</b>
<b>G12K5N</b>	G7012 with nylon thimble	0.3 lbs. (0.1 kg)	<b>\$33.70</b>
<b>G12K5NK</b>	G7012 with nylon thimble, 3/4 in. (20 mm) self-locking snap hook	0.9 lbs. (0.4 kg)	<b>\$44.10</b>
<b>G12K5NH</b>	G7012 with nylon thimble, 2 1/4 in. (57 mm) self-locking snap hook	1.4 lbs. (0.6 kg)	<b>\$66.50</b>
<b>G12K100N</b>	100 ft. (30 m) of 1/2 in. (13 mm) Kernmantle lifeline	10 lbs. (4.5 kg)	<b>\$344.40</b>
<b>G12K200N</b>	200 ft. (60 m) of 1/2 in. (13 mm) Kernmantle lifeline	20 lbs. (9.1 kg)	<b>\$651.80</b>
<b>G12K300N</b>	300 ft. (90 m) of 1/2 in. (13 mm) Kernmantle lifeline	30 lbs. (13.6 kg)	<b>\$959.20</b>

**ATTENTION**  
Lifelines are final sales  
No returns accepted




**1 877 472-2336**  
**www.actionscaffold.ca**



**ATTENTION: Lifelines are final sales – No returns accepted**

## BULK ROPE

PART #	DESCRIPTION	WEIGHT PER 100 FT.	PRICE PER FOOT	
			BULK	PER 1,200 FT. REEL
<b>G8058</b>	Superline ½ in. (16 mm) three strands (blue) Breaking strength: 11,500 lbs. (51.2 kN)	0.09 lbs. (0.04 kg)	<b>\$0.82</b>	<b>\$0.50</b>



## Special lengths – pricing calculation

This is pricing for standard length lifelines. For price of special length lifeline use the following method of calculation, (length in feet x price for the desired quantity x foot) + price for the desired quantity of eye splice assembly. i.e.: a 150 ft. (45 m) Superline lifeline (G8058 – 150 x \$0.82) with a 2¼ in. (57 mm) self-locking snap hook (GS5NH – \$106.50) = \$226.50.

## EYE SPLICE ASSEMBLIES

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Superline ½ in. (16.3 mm) (blue lifeline)</b>			
<b>GS5N</b>	With nylon thimble	0.2 lbs. (0.1 kg)	<b>\$30.80</b>
<b>GS5NK</b>	With nylon thimble, ¾ in. (20 mm) self-locking snap hook	0.8 lbs. (0.4 kg)	<b>\$45.90</b>
<b>GS5NH</b>	With nylon thimble, 2¼ in. (57 mm) self-locking snap hook	1.4 lbs. (0.6 kg)	<b>\$106.50</b>

For ¾ in. (20 mm) eye splice assemblies, please contact customer service.

## SUPERLINE LIFELINES WITH NYLON THIMBLE (372058)

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Superline lifelines</b>			
<b>GS25N</b>	25 ft. (7.6 m) Superline lifeline	2.8 lbs. (1.3 kg)	<b>\$52.90</b>
<b>GS50N</b>	50 ft. (15 m) Superline lifeline	5.4 lbs. (2.4 kg)	<b>\$74.90</b>
<b>GS100N</b>	100 ft. (30 m) Superline lifeline	10.5 lbs. (4.8 kg)	<b>\$118.70</b>
<b>Superline lifelines with ¾ in. (20 mm) self-locking snap hook</b>			
<b>GS25NK</b>	25 ft. (7.6 m) Superline lifeline	3.4 lbs. (1.5 kg)	<b>\$68.30</b>
<b>GS50NK</b>	50 ft. (15 m) Superline lifeline	6 lbs. (2.7 kg)	<b>\$90.20</b>
<b>GS100NK</b>	100 ft. (30 m) Superline lifeline	11.2 lbs. (5.1 kg)	<b>\$134.00</b>
<b>GS150NK</b>	150 ft. (45 m) Superline lifeline	17.2 lbs. (7.8 kg)	<b>\$174.30</b>
<b>GS200NK</b>	200 ft. (60 m) Superline lifeline	22.7 lbs. (10.3 kg)	<b>\$213.30</b>
<b>GS250NK</b>	250 ft. (75 m) Superline lifeline	28.2 lbs. (12.8 kg)	<b>\$252.10</b>
<b>GS300NK</b>	300 ft. (91 m) Superline lifeline	33.8 lbs. (15.3 kg)	<b>\$291.20</b>
<b>GS350NK</b>	350 ft. (105 m) Superline lifeline	39.3 lbs. (17.8 kg)	<b>\$331.50</b>
<b>GS400NK</b>	400 ft. (121 m) Superline lifeline	44.8 lbs. (20.3 kg)	<b>\$372.80</b>

## SUPERLINE LIFELINES WITH NYLON THIMBLE (372058)

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Superline lifelines with 2¼ in. (57 mm) self-locking snap hook</b>			
<b>GS50NH</b>	50 ft. (15 m) Superline lifeline	6.8 lbs. (3.1 kg)	<b>\$151.40</b>
<b>GS100NH</b>	100 ft. (30 m) Superline lifeline	11.8 lbs. (5.4 kg)	<b>\$195.20</b>
<b>GS150NH</b>	150 ft. (45 m) Superline lifeline	17.7 lbs. (8.1 kg)	<b>\$236.30</b>
<b>GS200NH</b>	200 ft. (60 m) Superline lifeline	22.1 lbs. (10 kg)	<b>\$282.80</b>
<b>GS250NH</b>	250 ft. (75 m) Superline lifeline	27 lbs. (12.2 kg)	<b>\$323.60</b>
<b>GS300NH</b>	300 ft. (91 m) Superline lifeline	32.4 lbs. (14.7 kg)	<b>\$370.60</b>
<b>GS350NH</b>	350 ft. (105 m) Superline lifeline	37.1 lbs. (16.8 kg)	<b>\$411.40</b>
<b>GS400NH</b>	400 ft. (121 m) Superline lifeline	42.7 lbs. (19.4 kg)	<b>\$458.20</b>



# self-retracting lanyards

## TRACPAC SELF-RETRACTING LANYARDS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>One arm</b>			
<b>C0506Z/E4</b>	6 ft. (1.8 m) Tracpac self-retracting lanyard incorporating shock-absorbing lanyard with ¾ in. (20 mm) self-locking snap hook both ends - <b>E4</b>	2.5 lbs. (1.1 kg)	<b>\$225.90</b>
<b>C0506Z/E6</b>	6 ft. (1.8 m) Tracpac self-retracting lanyard incorporating shock-absorbing lanyard with ¾ in. (20 mm) self-locking snap hook both ends - <b>E6</b>	2.5 lbs. (1.1 kg)	<b>\$231.40</b>
<b>Two arms</b>			
<b>C0527Y/1E4</b>	7 ft. (2.1 m) self-retracting lanyard incorporating shock-absorbing lanyard with two arms, ¾ in. (20 mm) self-locking snap hook at shock pack and 2½ in. (64 mm) aluminium self-locking snap hooks at each arm - <b>E4</b>	4.8 lbs. (2.2 kg)	<b>\$504.00</b>
<b>C0527Y/1E6</b>	7 ft. (2.1 m) self-retracting lanyard incorporating shock-absorbing lanyard with two arms, ¾ in. (20 mm) self-locking snap hook at shock pack and 2½ in. (64 mm) aluminium self-locking snap hooks at each arm - <b>E6</b>	4.8 lbs. (2.2 kg)	<b>\$509.50</b>

## 10 FT. (3 M) SELF-RETRACTING WEB LANYARD WITH COVER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>RN9QK</b>	10 ft. (3 m) self-retracting web lanyard with cover with autolocking carabiner and ¾ in. (20 mm) self-locking snap hook	2.8 lbs. (1.3 kg)	<b>\$205.50</b>
<b>PM11Z</b>	¾ in. (16 mm) replacement upper carabiner	0.4 lbs. (0.2 kg)	<b>\$36.80</b>



C0506Z/E4



C0527Y/1E4






RN9QK

# blocfor®

## self-retracting lifelines


### BLOCFOR® SELF-RETRACTING LIFELINES

PART #	DESCRIPTION	WEIGHT	PRICE
<b>blocfor® B20 web self-retracting lifeline</b>			
<b>RT20WC8</b>	20 ft. (6 m) blocfor® B20 web self-retracting lifeline		<b>\$455.00</b>
<b>blocfor® AES self-retracting lifelines</b>			
<b>RA20G</b>	20 ft. (6 m) blocfor® AES self-retracting lifeline with galvanized steel wire rope	11.7 lbs. (5.3 kg)	<b>\$475.00</b>
<b>RA30G</b>	30 ft. (9 m) blocfor® AES self-retracting lifeline with galvanized steel wire rope	11.9 lbs. (5.4 kg)	<b>\$559.70</b>
<b>RA20S</b>	20 ft. (6 m) blocfor® AES self-retracting lifeline with stainless steel wire rope	11.7 lbs. (5.3 kg)	<b>\$520.00</b>
<b>RA30S</b>	30 ft. (9 m) blocfor® AES self-retracting lifeline with stainless steel wire rope	11.9 lbs. (5.4 kg)	<b>\$612.50</b>
<b>RA30R</b>	30 ft. (9 m) blocfor® AES self-retracting lifeline with synthetic rope	11.9 lbs. (5.4 kg)	<b>\$649.40</b>
<b>RA30G/LE</b>	30 ft. (9 m) blocfor® AES leading edge self-retracting lifeline with galvanized steel wire rope	12.3 lbs. (5.6 kg)	<b>\$584.60</b>
<b>blocfor® self-retracting lifelines</b>			
<b>RT50G</b>	50 ft. (15 m) blocfor® self-retracting lifeline with galvanized steel wire rope	20 lbs. (9.1 kg)	<b>\$755.00</b>
<b>RT75G</b>	75 ft. (23 m) blocfor® self-retracting lifeline with galvanized steel wire rope	35 lbs. (15.9 kg)	<b>\$1,399.00</b>
<b>RT100G</b>	100 ft. (30 m) blocfor® self-retracting lifeline with galvanized steel wire rope	36.6 lbs. (16.6 kg)	<b>\$1,452.00</b>
<b>RT50G/LE</b>	50 ft. (15 m) blocfor® leading edge self-retracting lifeline with galvanized steel wire rope	20,4 lbs. (9,3 kg)	<b>\$814.50</b>
<b>RT50S</b>	50 ft. (15 m) blocfor® self-retracting lifeline with stainless steel wire rope	20 lbs. (9.1 kg)	<b>\$897.60</b>
<b>RT75S</b>	75 ft. (23 m) blocfor® self-retracting lifeline with stainless steel wire rope	35 lbs. (15.9 kg)	<b>\$1,727.00</b>
<b>RT100S</b>	100 ft. (30 m) blocfor® self-retracting lifeline with stainless steel wire rope	36.6 lbs. (16.6 kg)	<b>\$1,780.00</b>
<b>RT50R</b>	50 ft. (15 m) blocfor® self-retracting lifeline with synthetic rope	20 lbs. (9.1 kg)	<b>\$913.40</b>
<b>RT100R</b>	100 ft. (30 m) blocfor® self-retracting lifeline with synthetic rope	36.6 lbs. (16.6 kg)	<b>\$1,822.00</b>
<b>Accessories</b>			
	<b>Optional upper swivel attachment</b> Add "/SW" to the end of the product code	0.3 lbs. (0.1 kg)	<b>\$79.60</b>
<b>PM11Z</b>	¾ in. (16 mm) replacement upper carabiner	0.4 lbs. (0.2 kg)	<b>\$36.80</b>

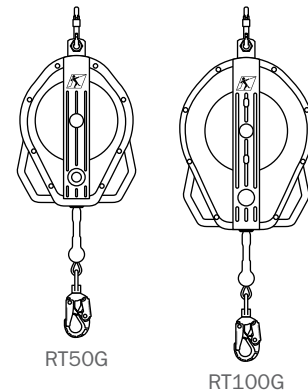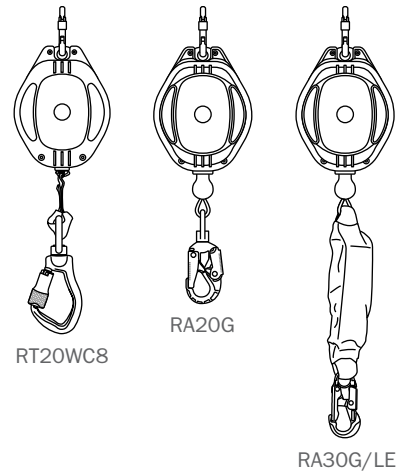


### DEROPE® EMERGENCY ESCAPE/CONTROLLED DESCENT DEVICES


PART #	DESCRIPTION	WEIGHT	PRICE
<b>derope® T descent device with:</b>			
<ul style="list-style-type: none"> <li>6 ft. (1.8 m) vinyl covered wire rope sling - V4173</li> <li>½ in. (16 mm) autolocking carabiner - PM11Z</li> <li>J-knife - KSOS</li> <li>Rescue/rope bag - XB23144 or XB26168</li> </ul>			
<b>KT7200/TK</b>	200 ft. (60 m) derope® T rescue system	10.1 lbs. (4.6 kg)	<b>\$2,003.00</b>
<b>KT7300/TK</b>	300 ft. (91 m) derope® T rescue system	11.8 lbs. (5.4 kg)	<b>\$2,274.00</b>
<b>KT7400/TK</b>	400 ft. (121 m) derope® T rescue system	13.9 lbs. (6.3 kg)	<b>\$2,544.00</b>
<b>KT7500/TK</b>	500 ft. (152 m) derope® T rescue system	15.5 lbs. (7 kg)	<b>\$2,814.00</b>
<b>KT7600/TK</b>	600 ft. (182 m) derope® T rescue system	17.2 lbs. (7.8 kg)	<b>\$3,084.00</b>
<b>derope® Up A descent device with:</b>			
<ul style="list-style-type: none"> <li>6 ft. (1.8 m) vinyl covered wire rope sling - V4173</li> <li>½ in. (16 mm) autolocking carabiner - PM11Z</li> <li>J-knife - KSOS</li> <li>Rescue/rope bag - XB23144 or XB26168</li> </ul>			
<b>KT7200/AK</b>	200 ft. (60 m) derope® Up A rescue system	23.5 lbs. (10.7 kg)	<b>\$2,487.00</b>
<b>KT7300/AK</b>	300 ft. (91 m) derope® Up A rescue system	26.9 lbs. (12.2 kg)	<b>\$2,757.00</b>
<b>KT7400/AK</b>	400 ft. (121 m) derope® Up A rescue system	30.3 lbs. (13.7 kg)	<b>\$3,027.00</b>
<b>Ladder derope® Up E descent device with:</b>			
<ul style="list-style-type: none"> <li>Mounted ladder adapter</li> <li>Adjustable lanyard including two ½ in. (16 mm) PM11Z carabiners - D58U98</li> <li>Edge roller - K072586K</li> <li>Rescue bag - XB26168</li> </ul>			
<b>KT7300/WK</b>	300 ft. (91 m) derope® Up E rescue system	30.4 lbs. (13.8 kg)	<b>\$3,490.00</b>
<b>KT7330/WK</b>	330 ft. (100 m) derope® Up E rescue system	33.8 lbs. (15.3 kg)	<b>\$3,574.00</b>
<b>Ladder Derope® Up E descent device with:</b>			
<ul style="list-style-type: none"> <li>Mounted ladder adapter</li> <li>Adjustable lanyard including two ½ in. (16 mm) PM11Z carabiners - D58U98</li> <li>Edge roller - K072586K</li> <li>T-bar - K5TBAR/K</li> <li>Stopfor® A rope grab - WA58</li> <li>Rescue bag - XB26168</li> </ul>			
<b>KT7300/WKE</b>	300 ft. (91 m) derope® Up E rescue system	34.5 lbs. (15.6 kg)	<b>\$3,693.00</b>
<b>KT7330/WKE</b>	330 ft. (100 m) derope® Up E rescue system	35.5 lbs. (16.1 kg)	<b>\$3,777.00</b>
<b>Tripod Derope® Up R descent device</b>			
<b>KT7050/R</b>	50 ft. (15 m) derope® Up R rescue system	17.5 lbs. (7.9 kg)	<b>\$2,601.00</b>
<b>KT7100/R</b>	100 ft. (30 m) derope® Up R rescue system	19.5 lbs. (8.8 kg)	<b>\$2,737.00</b>
<b>Accessories</b>			
<b>GC7S9</b>	Super dry, semi-static ¾ in. (9.5 mm) Kermantle rope - Per foot	0.03 lbs. (0.01 kg)	<b>\$2.90</b>
<b>XC1600-NF</b>	Hard-shell case	12.8 lbs. (5.8 kg)	<b>\$328.70</b>
<b>KSTRAP</b>	Hard-shell case lifting strap	0.7 lbs. (0.3 kg)	<b>\$65.10</b>
<b>7987428</b>	Bracket		<b>\$518.00</b>




derope® T descent device




derope® Up A descent device

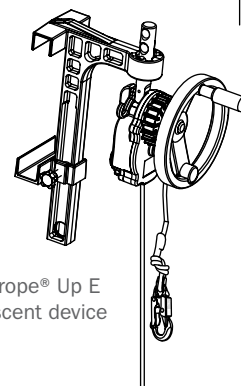

derope® Up E descent device




derope® Up R descent device



XC1600-NF

# control descent device


CONTROL DESCENT DEVICE			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>K6013572</b>	D4 descender double safety – 7/16 in. (11 mm) Kernmantle rope – G70716	1.2 lbs. (0.5 kg)	<b>\$329.30</b>
<b>D4 descender kits with:</b> <ul style="list-style-type: none"> <li>▪ D4 descender (K6013572)</li> <li>▪ Rope assembly</li> <li>▪ 6 ft. (1 m) endless sling (V41326)</li> <li>▪ 7/16 in. (16 mm) carabiner (PM11Z)</li> <li>▪ Carrying bag</li> </ul>			
<b>KIT-D430</b>	30 ft. (9 m) D4 descender kit	5.3 lbs. (2.4 kg)	<b>\$483.40</b>
<b>KIT-D450</b>	50 ft. (15 m) D4 descender kit	7.3 lbs. (3.3 kg)	<b>\$534.50</b>
<b>KIT-D475</b>	75 ft. (23 m) D4 descender kit	9.8 lbs. (4.4 kg)	<b>\$598.30</b>
<b>KIT-D4100</b>	100 ft. (30 m) D4 descender kit	12.3 lbs. (5.6 kg)	<b>\$662.10</b>



height safety / rescue devices / manual descent devices

## ascent/descent systems

ASCENT/DESCENT SYSTEMS			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>K50S25</b>	25 ft. (7.6 m) ascent/descent system	15 lbs. (6.8 kg)	<b>\$2,086.00</b>
<b>K50S50</b>	50 ft. (15 m) ascent/descent system	21.5 lbs. (9.8 kg)	<b>\$2,423.00</b>
<b>K50S75</b>	75 ft. (23 m) ascent/descent system	28 lbs. (12.7 kg)	<b>\$2,803.00</b>
<b>K50S100</b>	100 ft. (30 m) ascent/descent system	34.5 lbs. (15.6 kg)	<b>\$3,219.00</b>
<b>K51S38</b>	Additional foot of 7/16 in. (11 mm) static Kernmantle rope, the system requires 4 ft. (1.2 m) of rope for each foot of working length – <i>Per foot</i>	0.3 lbs. (0.1 kg)	<b>\$2.40</b>
<b>K3JR48</b>	Replacement handle for ascent/descent system, includes: right ascender handle, rope and carabiner	4 lbs. (1.8 kg)	<b>\$268.70</b>
<b>K3020492</b>	Right ascender handle	0.5 lbs. (0.2 kg)	<b>\$239.10</b>
<b>K3020502</b>	Left ascender handle	0.5 lbs. (0.2 kg)	<b>\$239.10</b>

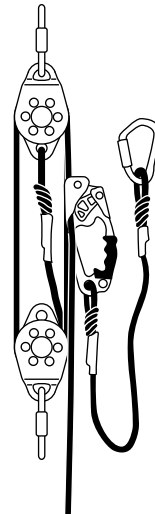

# accessories

for rescue and control descent

ACCESSORIES FOR RESCUE AND CONTROL DESCENT			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>CL02Z</b>	2 ft. (0.6 m) web lanyard with ¾ in. (20 mm) steel self-locking snap hooks	1.5 lbs. (0.7 kg)	<b>\$48.20</b>
<b>K6FL6A</b>	Suspension loop	0.5 lbs. (0.2 kg)	<b>\$34.10</b>
<b>XB23144</b>	Medium bag for less than 300 ft. (91 m) of rope	1.7 lbs. (0.8 kg)	<b>\$136.70</b>
<b>XB26168</b>	Large bag for more than 300 ft. (91 m) of rope	3.2 lbs. (1.5 kg)	<b>\$233.30</b>
<b>K072586K</b>	Edge roller (rope protection)	1.1 lbs. (0.5 kg)	<b>\$232.90</b>
<b>K9TRPS</b>	Victim transfer pulley with carabiners and bag	2.2 lbs. (1 kg)	<b>\$744.50</b>
<b>XB2410</b>	Bag for victim transfer pulley	0.3 lbs. (0.1 kg)	<b>\$56.10</b>
<b>K3A16</b>	Climbing helmet	1.5 lbs. (0.7 kg)	<b>\$280.50</b>
<b>KS0S</b>	J-knife	0.1 lbs. (0.05 kg)	<b>\$27.90</b>
<b>K5TBR/K</b>	T-bar handle	1 lbs. (0.5 kg)	<b>\$191.60</b>
<b>K5HT9</b>	Rescue cradle, one person	2 lbs. (0.9 kg)	<b>\$231.90</b>
<b>K8DC01</b>	68½ in. (1.75 m) daisy chain	0.4 lbs. (0.2 kg)	<b>\$51.20</b>




CL02Z



K6FL6A



XB23144



XB26168




K072586K



K9TRPS




XB2410




K3A16




KS0S



K5TBR/K



K5HT9




K8DC01

# wind products

## TRACX HARNESS – POLYESTER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>AU7132/X</b>	TracX harness, auto-buckles, TracX pad, side-positioning D-rings, sternal D-ring, fixed chest strap, dorsal D-ring, one size	5.3 lbs. (2.4 kg)	<b>\$243.80</b>
<b>AU7132/XT</b>	AU7132/X with leg pads	5.6 lbs. (2.5 kg)	<b>\$258.00</b>
<b>AU7112/X</b>	AU7132/X with frontal D-rings		<b>\$267.90</b>
<b>AU7112/XT</b>	AU7132/X with frontal D-rings and leg pads		<b>\$275.70</b>


Available sizes: Small, one size fits most, X-large and XX-large.



## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA126H/RE4</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.6 lbs. (3 kg)	<b>\$251.30</b>

Available length: 6 ft. (1.8 m) only.

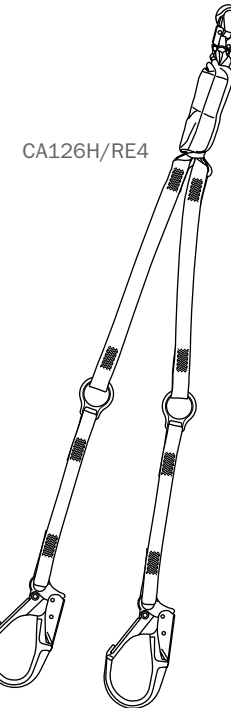

## TRACPAC RESCUE LANYARD WITH DUAL SHOCK ABSORBER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>CA226H/RE4</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	6.5 lbs. (2.9 kg)	<b>\$268.10</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.

## STRETCHFOR RESCUE SHOCK-ABSORBING LANYARDS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Two arms</b>			
<b>C526H/RE4</b>	6 ft. (1.8 m), two arms with a ¾ in. (20 mm) self-locking snap hook at shock-pack and 2¼ in. (57 mm) at the arms	5.3 lbs. (2.4 kg)	<b>\$188.60</b>

Available length: stretches from 4½ to 6 ft. (1.4 to 1.8 m) only.




# confined space systems


## STANDARD CONFINED SPACE SYSTEMS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>System One</b>			
<ul style="list-style-type: none"> <li>7 ft. (2.1 m) tripod</li> <li>blocfor® retrieval lifeline</li> </ul>			
<b>T51F50G</b>	50 ft. (15 m) galvanized wire rope	82.3 lbs. (34.3 kg)	<b>\$3,300.00</b>
<b>T51F100G</b>	100 ft. (30 m) galvanized wire rope	96.3 lbs. (43.7 kg)	<b>\$4,512.00</b>
<b>System Two</b>			
<ul style="list-style-type: none"> <li>7 ft. (2.1 m) tripod</li> <li>blocfor® retrieval lifeline</li> <li>Work winch</li> </ul>			
<b>T52F50G</b>	50 ft. (15 m) galvanized wire rope	107.8 lbs. (48.9 kg)	<b>\$4,350.00</b>
<b>T52F100G</b>	100 ft. (30 m) galvanized wire rope	136.2 lbs. (61.8 kg)	<b>\$5,730.00</b>
<b>System Three</b>			
<ul style="list-style-type: none"> <li>7 ft. (2.1 m) tripod</li> <li>blocfor® self-retracting lifeline</li> <li>Work winch</li> </ul>			
<b>T53F50G</b>	50 ft. (15 m) galvanized wire rope	102.3 lbs. (46.4 kg)	<b>\$3,347.00</b>
<b>T53F100G</b>	100 ft. (30 m) galvanized wire rope	132.9 lbs. (60.3 kg)	<b>\$4,124.00</b>


All the above systems include required head pulleys, mounting brackets and carrying bags.



System One




System Two




System Three

MODEL	DESCRIPTION	TRIPOD	BI-DIRECTIONAL RETRIEVAL		WINCH		RETRACTABLE LIFELINE	
		T3S7	T1T50G	T1T100G	T2S50G	T2S100G	RT50G	RT100G
<b>T51F50G</b>	Confined space system One – 50 ft. (15 m)	■	■					
<b>T51F100G</b>	Confined space system One – 100 ft. (30 m)	■		■				
<b>T52F50G</b>	Confined space system Two – 50 ft. (15 m)	■	■		■			
<b>T52F100G</b>	Confined space system Two – 100 ft. (30 m)	■		■		■		
<b>T53F50G</b>	Confined space system Three – 50 ft. (15 m)	■			■		■	
<b>T53F100G</b>	Confined space system Three – 100 ft. (30 m)	■				■		■


All the above systems include required head pulleys, mounting brackets and carrying bags.



Tripod



Bi-directional retrieval



Winch



Retractable lifeline


# accessories and equipment

## for confined space systems

### ACCESSORIES AND EQUIPMENT FOR CONFINED SPACE SYSTEMS


PART #	DESCRIPTION	WEIGHT	PRICE
<b>T9YL2Z</b>	2 ft. (0.6 m) web spreader bar	2.1 lbs. (1 kg)	<b>\$161.00</b>
<b>T2S50G*</b>	50 ft. (15 m) work winch	22 lbs. (10 kg)	<b>\$1,339.00</b>
<b>T2S100G*</b>	100 ft. (30 m) work winch	34 lbs. (15.4 kg)	<b>\$1,492.00</b>
<b>T2S200G*</b>	200 ft. (60 m) work winch	48 lbs. (21.8 kg)	<b>\$2,920.00</b>
<b>T90B4</b>	Leg-mounting bracket for blocfor® retrieval lifeline	16.5 lbs. (7.5 kg)	<b>\$220.10</b>
<b>T90B5</b>	Tripod leg-mounting bracket	10.3 lbs. (4.7 kg)	<b>\$66.30</b>
<b>K3040102</b>	Steel head pulley	0.7 lbs. (0.3 kg)	<b>\$46.60</b>
<b>PM11Z</b>	5/8 in. (16 mm) alloy steel carabiner	0.4 lbs. (0.2 kg)	<b>\$36.80</b>

\*Work winch must be used with a fall arrest system.

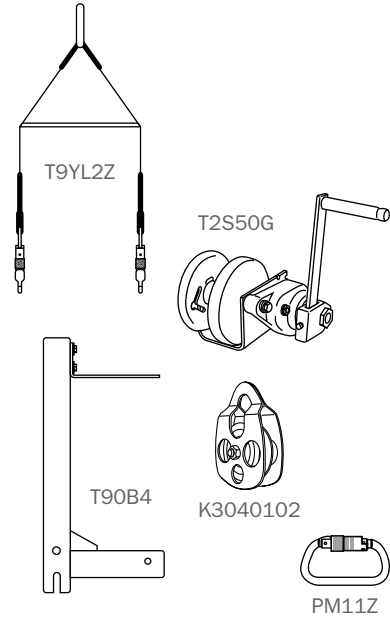

### BLOCFOR® BI-DIRECTIONAL RETRIEVAL LIFELINES


PART #	DESCRIPTION	WEIGHT	PRICE
<b>T1T50G</b>	50 ft. (15 m) blocfor® bi-directional retrieval lifeline with galvanized steel wire rope	21 lbs. (9.5 kg)	<b>\$2,050.00</b>
<b>T1T100G</b>	100 ft. (30 m) blocfor® bi-directional retrieval lifeline with galvanized steel wire rope	45 lbs. (20.4 kg)	<b>\$2,350.00</b>
<b>T1T50S</b>	50 ft. (15 m) blocfor® bi-directional retrieval lifeline with stainless steel wire rope	21 lbs. (9.5 kg)	<b>\$2,250.00</b>
<b>T1T100S</b>	100 ft. (30 m) blocfor® bi-directional retrieval lifeline with stainless steel wire rope	45 lbs. (20.4 kg)	<b>\$2,650.00</b>



### TRIPODS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>T3F7</b>	7 ft. (2.1 m) telescopic tripod Minimum breaking strength 5,000 lbs. (22.2 kN)	43.5 lbs. (19.7 kg)	<b>\$1,162.00</b>
<b>T3F9</b>	9 ft. (2.7 m) telescopic tripod Minimum breaking strength 5,000 lbs. (22.2 kN)	67 lbs. (30.4 kg)	<b>\$1,513.00</b>
<b>XB15105</b>	Carrying bag for tripod up to 10 ft. (3 m)	15 lbs. (6.8 kg)	<b>\$329.80</b>

\*Work winch must be used with a fall arrest system.

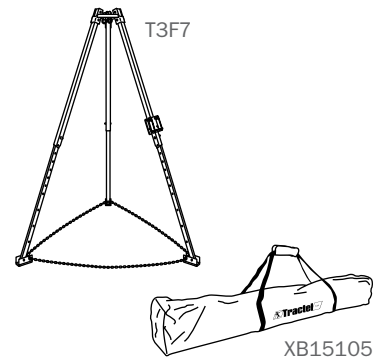

# rescue and rope access

## RESCUE AND ROPE ACCESS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Pulleys</b>			
<b>K3040162</b>	S pulley (fixed side plates) – ¾ to ½ in. (9 to 13 mm) diameter Kernmantle rope	0.3 lbs. (0.1 kg)	<b>\$32.80</b>
<b>K3040172</b>	S pulley (rotating side plates) – ¾ to ½ in. (9 to 13 mm) diameter Kernmantle rope	0.4 lbs. (0.2 kg)	<b>\$37.30</b>
<b>K3040102</b>	M pulley (rotating side plates) – ¾ to ½ in. (8.4 to 16 mm) diameter Kernmantle rope	0.7 lbs. (0.3 kg)	<b>\$46.60</b>
<b>K3040112</b>	Double pulley (rotating side plates) – ¾ to ½ in. (8.4 to 16 mm) diameter Kernmantle rope	1.1 lbs. (0.5 kg)	<b>\$62.00</b>
<b>K3040092</b>	In-line double pulley – ¾ to ½ in. (8.4 to 13 mm) diameter Kernmantle rope	0.8 lbs. (0.4 kg)	<b>\$406.00</b>
<b>Rigging plate</b>			
<b>K3020512</b>	Rigging plate – ¾ to ½ in. (8.4 to 12 mm) diameter Kernmantle rope	0.4 lbs. (0.2 kg)	<b>\$112.70</b>
<b>Sternal ascent locking device</b>			
<b>K3017632</b>	Sternal ascent locking device – ¾ to ½ in. (9 to 13 mm) diameter Kernmantle rope	0.4 lbs. (0.2 kg)	<b>\$164.80</b>




K3040162




K3040172




K3040102



K3040112



K3040092



K3020512



K3017632

height safety / horizontal lifeline systems / temporary


## tempo III

temporary horizontal kernmantle lifeline

### TEMPO III TEMPORARY HORIZONTAL KERNMANTLE LIFELINE

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Tempo III system</b>			
<ul style="list-style-type: none"> <li>Tempo III rope adjuster with integral carabiner</li> <li>60 ft. (18 m) of 1/2 in. (12.5 mm) Kernmantle rope</li> <li>Two 6 ft. endless slings</li> <li>One ¾ in. (16 mm) carabiner (PM11Z)</li> <li>Three travel O-rings (47700)</li> <li>Storage bag (XB0820)</li> </ul>			
<b>H66500</b>	Tempo III temporary horizontal lifeline system	12 lbs. (5.4 kg)	<b>\$489.70</b>

Note: Refer to product's technical sheet for specifications on free fall distance, efforts at end anchors and number of users.



# stanchion

## temporary post

STANCHION			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>Stanchion</b>			
<b>H8100</b>	Single stanchion (end or intermediate)	40 lbs. (18.1 kg)	<b>\$837.20</b>
<b>travspring® kits for up to 2 users</b>			
<ul style="list-style-type: none"> <li>1 in. (25 mm) connectors (P202Z)</li> <li>Turnbuckle tensioner</li> <li>Tension indicator</li> <li>INRS energy absorber</li> <li>Wedge socket</li> <li>O-rings</li> <li>Wire rope</li> </ul>			
<b>HK-SPG2-60</b>	60 ft. (18 m) travspring® HLL system with one intermediate anchor	14.5 lbs. (6.6 kg)	<b>\$1,109.00</b>
<b>HK-SPG2-100</b>	100 ft. (30 m) travspring® HLL system with one intermediate anchor	18.5 lbs. (8.4 kg)	<b>\$1,317.00</b>
<b>HK-SPG2-150</b>	150 ft. (45 m) travspring® HLL system with two intermediate anchors	23.5 lbs. (10.7 kg)	<b>\$1,509.00</b>
<b>HK-SPG2-200</b>	200 ft. (60 m) travspring® HLL system with three intermediate anchors	28.5 lbs. (12.9 kg)	<b>\$1,687.00</b>
<b>HK-SPG2-250</b>	250 ft. (75 m) travspring® HLL system with four intermediate anchors	33.9 lbs. (15.4 kg)	<b>\$1,882.00</b>
<b>HK-SPG2-300</b>	300 ft. (90 m) travspring® HLL system with five intermediate anchors	38.9 lbs. (17.6 kg)	<b>\$2,067.00</b>



Note: Stanchion posts sold separately.

### Travsmart kits for up to 2 users

- Cable assembly
- One INRS energy absorber
- Tension indicator
- Turnbuckle


<b>HK-SMG2-100</b>	100 ft. (30 m) Travsmart HLL system with one intermediate anchor	18 lbs. (8.2 kg)	<b>\$1,310.00</b>
<b>HK-SMG2-150</b>	150 ft. (45 m) Travsmart HLL system with two intermediate anchors	23.1 lbs. (10.5 kg)	<b>\$1,513.00</b>
<b>HK-SMG2-200</b>	200 ft. (60 m) Travsmart HLL system with three intermediate anchors	28.2 lbs. (12.8 kg)	<b>\$1,717.00</b>
<b>HK-SMG2-250</b>	250 ft. (75 m) Travsmart HLL system with four intermediate anchors	33.7 lbs. (15.3 kg)	<b>\$1,931.00</b>
<b>HK-SMG2-300</b>	300 ft. (90 m) Travsmart HLL system with five intermediate anchors	38.8 lbs. (17.6 kg)	<b>\$2,134.00</b>

Note: Travsmart traveler, carabiner and stanchion posts available separately.

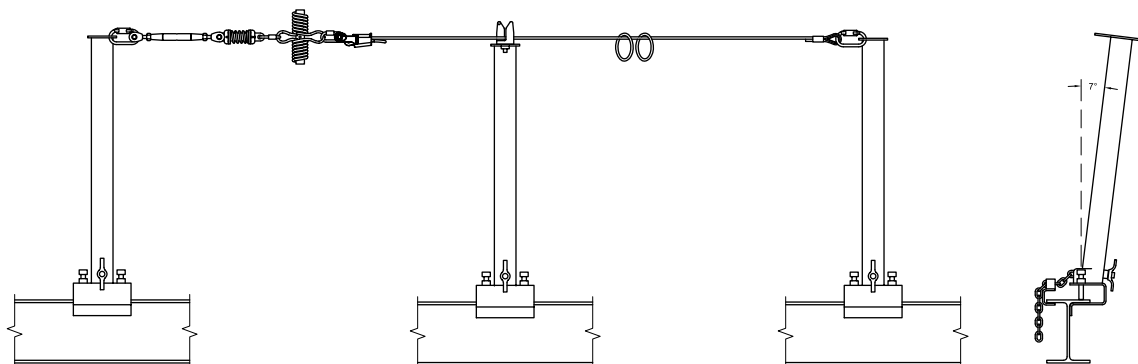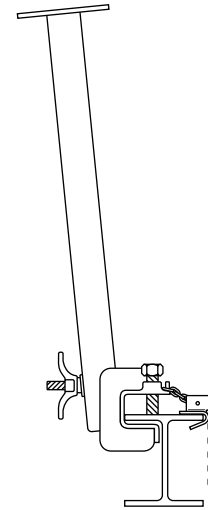

# travsmart

## permanent horizontal lifeline system



### TRAVSMART PERMANENT HORIZONTAL LIFELINE SYSTEM

PART #	DESCRIPTION	WEIGHT	PRICE
<b>Kits for up to 3 users</b>			
<ul style="list-style-type: none"> <li>Stainless steel cable assembly</li> <li>One INRS energy absorber</li> <li>Tension indicator</li> <li>Turnbuckle</li> <li>Two end anchors</li> </ul>			
<b>JK-SMSEA3-100</b>	100 ft. (30 m) Travsmart system with one intermediate support	20.7 lbs. (9.4 kg)	<b>\$1,588.00</b>
<b>JK-SMSEA3-150</b>	150 ft. (45 m) Travsmart system with two intermediate supports	25.8 lbs. (11.7 kg)	<b>\$1,879.00</b>
<b>JK-SMSEA3-200</b>	200 ft. (60 m) Travsmart system with three intermediate supports	30.9 lbs. (14 kg)	<b>\$2,201.00</b>
<b>JK-SMSEA3-250</b>	250 ft. (75 m) Travsmart system with four intermediate supports	36.4 lbs. (16.5 kg)	<b>\$2,482.00</b>
<b>JK-SMSEA3-300</b>	300 ft. (90 m) Travsmart system with five intermediate supports	41.5 lbs. (18.8 kg)	<b>\$2,772.00</b>

Note: Travsmart traveler and carabiner available separately

### Kits for up to 5 users

- Stainless steel cable assembly
- Two INRS energy absorbers
- Tension indicator
- Turnbuckle
- Two end anchors

<b>JK-SMSEA5-100</b>	100 ft. (30 m) Travsmart system with one intermediate support	23 lbs. (10.4 kg)	<b>\$1,886.00</b>
<b>JK-SMSEA5-150</b>	150 ft. (45 m) Travsmart system with two intermediate supports	28.1 lbs. (12.7 kg)	<b>\$2,178.00</b>
<b>JK-SMSEA5-200</b>	200 ft. (60 m) Travsmart system with three intermediate supports	33.2 lbs. (15.1 kg)	<b>\$2,468.00</b>
<b>JK-SMSEA5-250</b>	250 ft. (75 m) Travsmart system with four intermediate supports	38.7 lbs. (17.6 kg)	<b>\$2,780.00</b>
<b>JK-SMSEA5-300</b>	300 ft. (90 m) Travsmart system with five intermediate supports	43.8 lbs. (19.9 kg)	<b>\$3,070.00</b>

### Accessories

<b>PM11Z</b>	5/8 in. (16 mm) carabiner	0.4 lbs. (0.2 kg)	<b>\$36.80</b>
<b>J30251349</b>	Traveler	1.5 lbs. (0.7 kg)	<b>\$411.00</b>
<b>J30193847</b>	Standard intermediate anchor	1.3 lbs. (0.6 kg)	<b>\$98.90</b>

Note: Travsmart traveler and carabiner available separately

Note: Contact customer service for systems requiring overhead applications and corners.

Refer to product's technical sheet for specifications on free fall distance, efforts at end anchors and number of users.


Hardware and anchorage slings are not included. Refer to page 25.

# travsmart


permanent horizontal lifeline system

## COMPONENTS FOR TRAVSMART PERMANENT HORIZONTAL LIFELINE SYSTEM


PART #	DESCRIPTION	WEIGHT	PRICE
<b>J30193897</b>	End anchor with quick-link	1.8 lbs. (0.8 kg)	<b>\$87.10</b>
<b>J3640742</b>	Turnbuckle tensioner	1.3 lbs. (0.6 kg)	<b>\$119.90</b>
<b>J3666858</b>	Tension indicator	2 lbs. (0.9 kg)	<b>\$296.50</b>
<b>J3666688</b>	INRS energy absorber with quick link	0.9 lbs. (0.4 kg)	<b>\$364.10</b>
<b>J30193847</b>	Standard intermediate anchor	1.3 lbs. (0.6 kg)	<b>\$98.90</b>
<b>J30193857</b>	Overhead intermediate anchor	1.6 lbs. (0.7 kg)	<b>\$141.50</b>
<b>J3666698</b>	End anchor with quick link for posts	1.3 lbs. (0.6 kg)	<b>\$46.20</b>
<b>J30193837</b>	Wedge socket with quick link	0.9 lbs. (0.4 kg)	<b>\$146.50</b>
<b>J30193867</b>	Standard corner kit	2.5 lbs. (1.1 kg)	<b>\$274.60</b>
<b>J30193877</b>	Overhead corner kit	1.6 lbs. (0.7 kg)	<b>\$270.00</b>
<b>J30193887</b>	Corner plate	3.8 lbs. (1.7 kg)	<b>\$93.90</b>
<b>J30251349</b>	Traveler	1.5 lbs. (0.7 kg)	<b>\$411.00</b>
<b>J37009000</b>	Galvanized wire rope $\frac{5}{16}$ in. (8.4 mm) - Per foot	0.5 lbs. (0.2 kg)	<b>\$2.40</b>
<b>J37009000S</b>	Stainless Steel wire rope $\frac{5}{16}$ in. (8.4 mm) - Per foot	0.5 lbs. (0.2 kg)	<b>\$4.50</b>
<b>990LABHLL</b>	Handling per cut length (includes flemish eye)	-	<b>\$218.90</b>
<b>JNP1</b>	Information plate	0.3 lbs. (0.1 kg)	<b>\$44.00</b>
<b>PM11Z</b>	$\frac{5}{8}$ in. (16 mm) carabiner	0.4 lbs. (0.2 kg)	<b>\$36.80</b>




J30193897




J3640742




J3666858




J3666688




J30193847




J30193837



J30193867



J30251349



JNP1




**1 877 472-2336**  
www.actionscaffold.ca





# travflex® 2

permanent single-cable HLL system for light rooftop structures






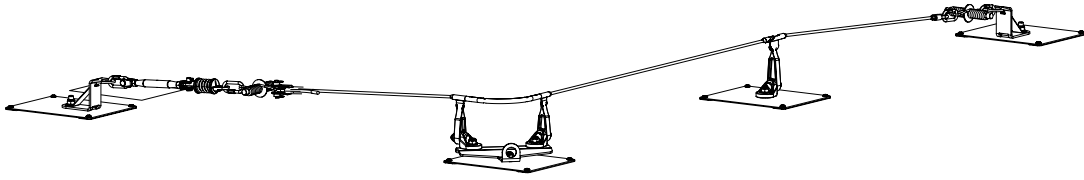


## TRAVFLEX® 2 PERMANENT SINGLE-CABLE HLL SYSTEM FOR LIGHT ROOFTOP STRUCTURES

PART #	DESCRIPTION	WEIGHT	PRICE
<b>J30100378</b>	End anchor – galvanized steel	1.3 lbs. (0.6 kg)	<b>\$120.10</b>
<b>J30100388</b>	End anchor – stainless steel	1.3 lbs. (0.6 kg)	<b>\$155.60</b>
<b>J3666688</b>	INRS energy absorber	0.9 lbs. (0.4 kg)	<b>\$364.10</b>
<b>J30100408</b>	Corner kit – galvanized steel	10.3 lbs. (4.7 kg)	<b>\$415.80</b>
<b>J30100418</b>	Corner kit – stainless steel	10.3 lbs. (4.7 kg)	<b>\$439.30</b>
<b>J30100618</b>	Corner kit – stainless steel for concrete	10.3 lbs. (4.7 kg)	<b>\$398.00</b>
<b>J3640742</b>	Turnbuckle tensioner	1.3 lbs. (0.6 kg)	<b>\$119.90</b>
<b>J30100398</b>	Intermediate support	2.6 lbs. (1.2 kg)	<b>\$169.30</b>
<b>J37009000</b>	Galvanized wire rope $\frac{5}{16}$ in. (8.4 mm) – Per foot	0.5 lbs. (0.2 kg)	<b>\$2.40</b>
<b>J37009000S</b>	Stainless steel wire rope $\frac{5}{16}$ in. (8.4 mm) – Per foot	0.5 lbs. (0.2 kg)	<b>\$4.50</b>
<b>990LABHLL</b>	Handling per cut length (includes flemish eye)	–	<b>\$218.90</b>
<b>J3666858</b>	Tension indicator	2 lbs. (0.9 kg)	<b>\$296.50</b>
<b>J30193837</b>	Wedge socket	0.9 lbs. (0.4 kg)	<b>\$146.50</b>
<b>J30251349</b>	Traveler	1.5 lbs. (0.7 kg)	<b>\$411.00</b>
<b>JNP1</b>	Information plate	0.3 lbs. (0.1 kg)	<b>\$44.00</b>
–	Interface plate – size and price per roofing panel	–	<b>ON REQUEST</b>




J3640742



# travspring®

## horizontal lifeline system

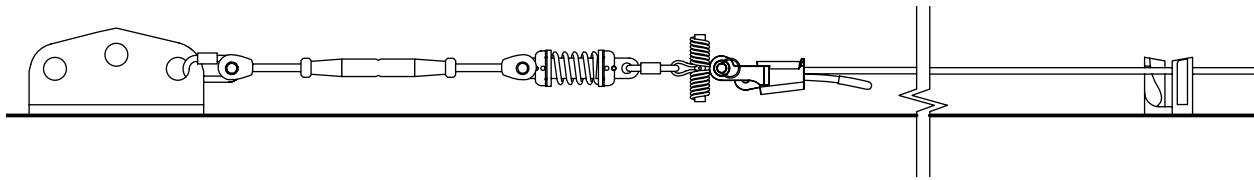

### TRAVSPRING® HORIZONTAL LIFELINE SYSTEM

PART #	DESCRIPTION	WEIGHT	PRICE
--------	-------------	--------	-------

#### travspring® horizontal lifeline system kits for up to 3 users

- 5/16 in. (16 mm) connectors (PM11Z)
- Turnbuckle tensioner
- Tension indicator
- INRS energy absorber
- Wedge socket
- O-rings
- Wire rope


\*Hardware not supplied

<b>JK-SPSEA3-100</b>	100 ft. (30 m) travspring® system with one intermediate support	20.7 lbs. (9.4 kg)	<b>\$1,292.00</b>
<b>JK-SPSEA3-150</b>	150 ft. (45 m) travspring® system with two intermediate supports	25.8 lbs. (11.7 kg)	<b>\$1,167.00</b>
<b>JK-SPSEA3-200</b>	200 ft. (60 m) travspring® system with three intermediate supports	30.9 lbs. (14 kg)	<b>\$1,653.00</b>
<b>JK-SPSEA3-250</b>	250 ft. (75 m) travspring® system with four intermediate supports	36.4 lbs. (16.5 kg)	<b>\$1,845.00</b>
<b>JK-SPSEA3-300</b>	300 ft. (90 m) travspring® system with five intermediate supports	41.5 lbs. (18.8 kg)	<b>\$2,026.00</b>


Note: Refer to product's technical sheet for specifications on free fall distance, efforts at end anchors and number of users.  
Does not include anchorage slings. Refer to page 25.

#### Components


<b>J3666848</b>	End anchor with quick link	1.6 lbs. (0.7 kg)	<b>\$153.40</b>
<b>J3666698</b>	End anchor with quick link for posts	1.3 lbs. (0.6 kg)	<b>\$46.20</b>
<b>J3666858</b>	Tension indicator	2 lbs. (0.9 kg)	<b>\$296.50</b>
<b>J3666688</b>	INRS energy absorber with quick link	0.9 lbs. (0.4 kg)	<b>\$364.10</b>
<b>J3640742</b>	Turnbuckle tensioner	1.3 lbs. (0.6 kg)	<b>\$119.90</b>
<b>J3666868</b>	Intermediate support with 5/16 in. (12.5 mm) hole	1.3 lbs. (0.6 kg)	<b>\$78.30</b>
<b>J30193837</b>	Wedge socket with quick link	0.9 lbs. (0.4 kg)	<b>\$146.50</b>
<b>J3666878</b>	Corner kit	2.9 lbs. (1.3 kg)	<b>\$498.70</b>
<b>J37009000</b>	Galvanized wire rope 5/16 in (8.4 mm) - Per foot	0.5 lbs. (0.2 kg)	<b>\$2.40</b>
<b>J37009000S</b>	Stainless steel wire rope 5/16 in (8.4 mm) - Per foot	0.5 lbs. (0.2 kg)	<b>\$4.50</b>
<b>990LABHLL</b>	Handling per cut length	-	<b>\$147.10</b>
<b>47700</b>	"O" ring, forged steel	0.3 lbs. (0.1 kg)	<b>\$15.20</b>
<b>JNP1</b>	Information plate	0.3 lbs. (0.1 kg)	<b>\$44.00</b>



J3666848




J3666858




J3666688



J3640742



J3666868




J30193837



J3666878




47700




JNP1

# travsafe®


permanent horizontal lifeline system

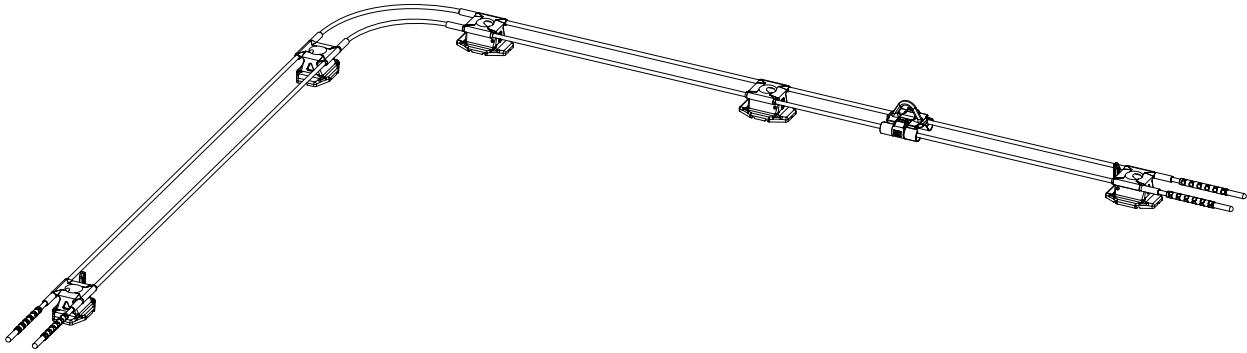


TRAVSAFE® PERMANENT HORIZONTAL LIFELINE SYSTEM			
PART #	DESCRIPTION	WEIGHT	PRICE
<b>J27006000G</b>	5/16 in. (8.4 mm) single-strand galvanized steel wire rope – Per foot	–	<b>\$1.20</b>
<b>J27005000S</b>	5/16 in. (8.4 mm) single-strand stainless steel wire rope – Per foot	–	<b>\$4.20</b>
<b>990LABHLL</b>	Handling per cut length	–	<b>\$147.10</b>
<b>J300268015</b>	Post corner plate	4.1 lbs. (1.9 kg)	<b>\$167.30</b>
<b>J300268008</b>	4 in. (100 mm) travsafe® end sleeves	0.1 lbs. (0.05 kg)	<b>\$19.50</b>
<b>J300268009</b>	1 in. (25 mm) travsafe® shock-absorbing sleeve	0.02 lbs. (0.01 kg)	<b>\$7.00</b>
<b>J300268010</b>	1 3/8 in. (35 mm) travsafe® bi-material shock-absorbing sleeve	0.02 lbs. (0.01 kg)	<b>\$24.10</b>
<b>J300268030</b>	Splice sleeve	0.3 lbs. (0.1 kg)	<b>\$171.40</b>
<b>J300268916</b>	Stainless steel entrance and exit anchor	1.25 lbs. (0.6 kg)	<b>\$233.10</b>
<b>J300268050</b>	Stainless steel intermediate anchor	1.1 lbs. (0.5 kg)	<b>\$129.20</b>
<b>J300268900</b>	Traveler	1.3 lbs. (0.6 kg)	<b>\$390.80</b>
<b>J300268917</b>	Removable traveler	1.4 lbs. (0.6 kg)	<b>\$777.90</b>
<b>J3075919</b>	Rollsafe traveler	1.9 lbs. (0.9 kg)	<b>\$637.80</b>
<b>J300519351</b>	Rubber end cap for wire rope	0.01 lbs. (0.005 kg)	<b>\$0.60</b>
<b>JNP1</b>	Information plate	0.3 lbs. (0.1 kg)	<b>\$44.00</b>




J300268916




J300268050



J300268900




J300268917



J3075919

# tirsafe®

## temporary horizontal lifeline systems

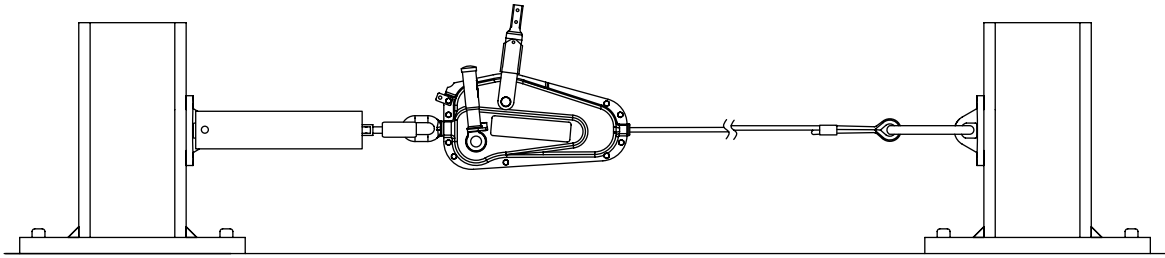

### TIRSAFE® TEMPORARY HORIZONTAL LIFELINE SYSTEMS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>tirsafe® unit</b>			
<b>H088159</b>	Tirsafe® unit	6 lbs. (2.7 kg)	<b>\$943.50</b>
<b>Kits with turnbuckle</b> <ul style="list-style-type: none"> <li>tirsafe® energy absorber</li> <li>5/16 in. (8.4 mm) wire rope lifeline</li> <li>Jaw/jaw turnbuckle tensioner</li> <li>One autolocking carabiner</li> <li>Three forged "O" rings</li> </ul>			
<b>H365001</b>	65 ft. (20 m) tirsafe® system	30 lbs. (13.6 kg)	<b>\$1,711.00</b>
<b>H310001</b>	100 ft. (30 m) tirsafe® system	47.5 lbs. (21.5 kg)	<b>\$1,768.00</b>

Note: Refer to product's technical sheet for specifications on free fall distance, efforts at end anchors and number of users.  
Does not include anchorage slings. Refer to page 25.



### Kits with tirfor® T3 manual hoist

<ul style="list-style-type: none"> <li>tirsafe® energy absorber</li> <li>5/16 in. (8.4 mm) wire rope lifeline</li> <li>tirfor® T3 manual hoist</li> <li>One autolocking carabiner</li> <li>Three forged "O" rings</li> </ul>			
<b>H41001</b>	100 ft. (30 m) tirsafe® system	49.3 lbs. (22.4 kg)	<b>\$2,373.00</b>
<b>H41501</b>	150 ft. (45 m) tirsafe® system	74.3 lbs. (33.7 kg)	<b>\$2,459.00</b>
<b>H42001</b>	200 ft. (60 m) tirsafe® system	99.3 lbs. (45 kg)	<b>\$2,548.00</b>
<b>H43001</b>	300 ft. (90 m) tirsafe® system	149.3 lbs. (67.7 kg)	<b>\$2,723.00</b>
<b>J37009000</b>	Bulk galvanized wire rope – Per foot	0.5 lbs. (0.2 kg)	<b>\$2.40</b>

Note: Refer to product's technical sheet for specifications on free fall distance, efforts at end anchors and number of users.  
Does not include anchorage slings. Refer to page 25.

### Accessories

<b>47700</b>	"O" ring, forged steel	0.3 lbs. (0.1 kg)	<b>\$15.20</b>
<b>V411010</b>	10 ft. (3 m) web anchor sling Breaking force: 10,000 lbs. (44.4 kN)	3 lbs. (1.4 kg)	<b>\$120.20</b>
<b>V4126</b>	6 ft. x 5/16 in. (1.8 m x 8.4 mm) galvanized wire rope sling Breaking force: 10,000 lbs. (44.4 kN)	3.5 lbs. (1.6 kg)	<b>\$86.30</b>
<b>78JWTKL</b>	5/8 x 9 in. (16.3 mm x 229 mm) jaw/jaw turnbuckle	3 lbs. (1.4 kg)	<b>\$82.90</b>

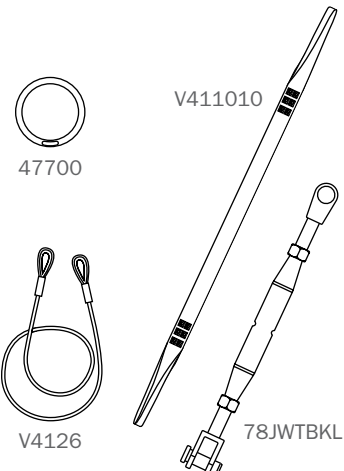

# dynaplug® HF 44

structural anchoring strength measuring tool

## DYNAPLUG® HF 44 STRUCTURAL ANCHORING STRENGTH MEASURING TOOL

PART #	DESCRIPTION	WEIGHT	PRICE
<b>190038</b>	dynaplug® HF 44/2/LPT Working load limit: 5,000 lbs. (2,500 kg)	11.5 lbs. (5.2 kg)	<b>\$6,220.00</b>
<b>190048</b>	dynaplug® HF 44/3/LPT Working load limit: 10,000 lbs. (5,000 kg)	25.4 lbs. (11.5 kg)	<b>\$9,150.00</b>



height safety / anchorage and safety ladder systems / anchor testers

# dynaline HF 37

lifeline tension dynamometer

## DYNALINE HF 37 LIFELINE TENSION DYNAMOMETER

PART #	DESCRIPTION	WEIGHT	PRICE
<b>89979</b>	Dynaline HF 37/1/B lifeline tensiometer	4.9 lbs. (2.2 kg)	<b>\$5,110.00</b>




height safety / anchorage and safety ladder systems / anchorage

# tie-back anchors



U-bar roof-mounted anchor



Wall-mounted anchor



Flush-mounted roof anchor

**For further details, please contact us for information and pricing.**


height safety / height safety ladder systems / faba ladders

# faba

rigid rail ladder safety systems

The Faba rigid rail ladder safety system is a fall protection system which can be installed onto an existing ladder or it can be supplied with a ladder and the complete system. It is available in galvanized steel, stainless steel or aluminum. The asymmetric rail prevents the rail grab from being inserted in the wrong direction. It has short locking distances which mean less impact on the body.

**The Faba is an engineered system.**  
**Please contact us for system information and pricing.**

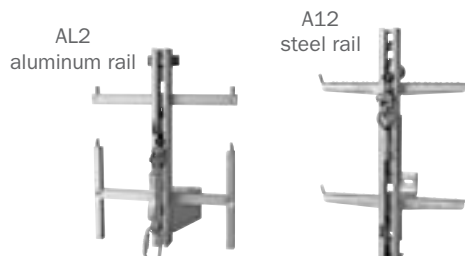

# stopcable®


## ladder safety systems

### STOPCABLE® LADDER SAFETY SYSTEMS

DESCRIPTION	WEIGHT	PART #	PRICE	PART #	PRICE
<b>5/16 in. (8.4 mm) steel wire rope</b>		<b>Galvanized steel</b>		<b>Stainless steel</b>	
20 ft. (6 m) system	18.2 lbs. (8.3 kg)	<b>L1T20</b>	<b>\$599.50</b>	<b>L1T20S</b>	<b>\$1,172.00</b>
30 ft. (9 m) system	20 lbs. (9 kg)	<b>L1T30</b>	<b>\$628.60</b>	<b>L1T30S</b>	<b>\$1,197.00</b>
40 ft. (12 m) system	21.8 lbs. (9.9 kg)	<b>L1T40</b>	<b>\$657.80</b>	<b>L1T40S</b>	<b>\$1,248.00</b>
50 ft. (15 m) system	24.4 lbs. (11 kg)	<b>L1T50</b>	<b>\$694.60</b>	<b>L1T50S</b>	<b>\$1,268.00</b>
60 ft. (18 m) system	26.2 lbs. (11.9 kg)	<b>L1T60</b>	<b>\$754.00</b>	<b>L1T60S</b>	<b>\$1,319.00</b>
70 ft. (21 m) system	28.8 lbs. (13.1 kg)	<b>L1T70</b>	<b>\$773.20</b>	<b>L1T70S</b>	<b>\$1,337.00</b>
80 ft. (24 m) system	30.6 lbs. (13.9 kg)	<b>L1T80</b>	<b>\$823.90</b>	<b>L1T80S</b>	<b>\$1,387.00</b>
90 ft. (27 m) system	33.1 lbs. (15 kg)	<b>L1T90</b>	<b>\$906.20</b>	<b>L1T90S</b>	<b>\$1,400.00</b>
100 ft. (30 m) system	34.9 lbs. (15.8 kg)	<b>L1T100</b>	<b>\$938.00</b>	<b>L1T100S</b>	<b>\$1,420.00</b>
110 ft. (33 m) system	37.5 lbs. (17 kg)	<b>L1T110</b>	<b>\$1,020.00</b>	<b>L1T110S</b>	<b>\$1,470.00</b>
120 ft. (36 m) system	39.3 lbs. (17.8 kg)	<b>L1T120</b>	<b>\$1,059.00</b>	<b>L1T120S</b>	<b>\$1,483.00</b>
130 ft. (39 m) system	41.1 lbs. (18.6 kg)	<b>L1T130</b>	<b>\$1,146.00</b>	<b>L1T130S</b>	<b>\$1,495.00</b>
140 ft. (42 m) system	43.7 lbs. (19.9 kg)	<b>L1T140</b>	<b>\$1,185.00</b>	<b>L1T140S</b>	<b>\$1,546.00</b>
150 ft. (45 m) system	45.5 lbs. (20.6 kg)	<b>L1T150</b>	<b>\$1,211.00</b>	<b>L1T150S</b>	<b>\$1,566.00</b>
160 ft. (48 m) system	48.1 lbs. (21.8 kg)	<b>L1T160</b>	<b>\$1,274.00</b>	<b>L1T160S</b>	<b>\$1,616.00</b>
170 ft. (51 m) system	49.9 lbs. (22.6 kg)	<b>L1T170</b>	<b>\$1,312.00</b>	<b>L1T170S</b>	<b>\$1,628.00</b>
180 ft. (54 m) system	51.7 lbs. (23.5 kg)	<b>L1T180</b>	<b>\$1,349.00</b>	<b>L1T180S</b>	<b>\$1,647.00</b>
190 ft. (57 m) system	54.3 lbs. (24.6 kg)	<b>L1T190</b>	<b>\$1,426.00</b>	<b>L1T190S</b>	<b>\$1,698.00</b>
200 ft. (60 m) system	56.1 lbs. (25.4 kg)	<b>L1T200</b>	<b>\$1,470.00</b>	<b>L1T200S</b>	<b>\$1,712.00</b>

### DETACHABLE TRAVELER FOR STOPCABLE® LADDER SAFETY SYSTEMS

PART #	DESCRIPTION	WEIGHT	PRICE
<b>LT516</b>	Detachable traveler for 5/16 in. (8.4 mm) wire rope	1.4 lbs. (0.6 kg)	<b>\$271.30</b>

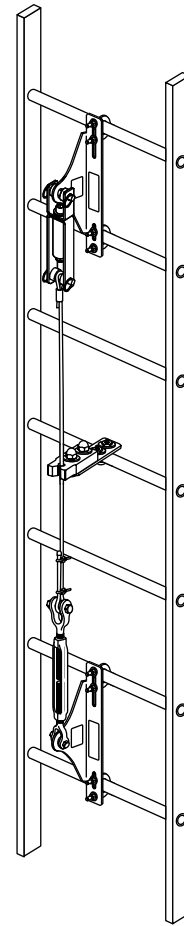

**Systems available  
up to 600 ft.  
(182 m)**

**LADDER NOT  
INCLUDED**

**All systems include an upper bracket with an integrated  
shock absorber, lower bracket and wire rope adjuster.**

**ALL SYSTEMS REQUIRE A DETACHABLE TRAVELER.**

# T-Rail 17

portable and non-penetrating guardrails

**EASY INSTALLATION**

**NO DRILLING**

**NO TOOLS NEEDED**

**IDEAL FOR RENTAL APPLICATIONS**

**NEW!**

T-Rail 17 is a versatile line of guardrail systems that fits a variety of applications and meets OSHA guidelines for permanent guardrail without penetrating your roof as no drilling is needed for installation. In addition, it can be used as a portable system to be moved from one area to another.


Installation is easy, so there's no need to incur the expense of hiring a contractor to install T-Rail 17. Two workers can erect over 500 feet of railing in less than two hours without drilling holes into your roof. No other guardrail system can make this claim. Plus, all railings come with simple installation instructions.

## Features

- Four port base allows infinite positioning of the rail sections
- Positive locking system secures rails to base
- Height of the standard top rail measures 42 in. (106 cm) from the working surface when installed in base.
- Complies with OSHA regulations 29 CFR 1910.23 and 1926.502
- No intermediate counter weights required, reducing trip hazards
- Bases come standard with EPDM pads on bottom
- Adjustable midrails available when obstacles need to go through rail.
- Low profile 1 ft. (0.5 m) high rails also available used for completing a rail system where large obstacles are present.
- Optional EPDM or BUR pads are available
- Working handles are cast into base for easy lifting and positioning
- Rail Transport Cart and mover available to facilitate storage and installation
- Systems are available in Powder Coated or Hot Dipped Galvanized finishes. Custom colours are also available – please contact customer service for more information.

## Applications

- Manhole barricade
- Rail car platforms
- Ramps
- Construction sites
- Dig Sites
- Mezzanines
- Assembly and break areas
- Crowd control
- Hoist areas
- And more!

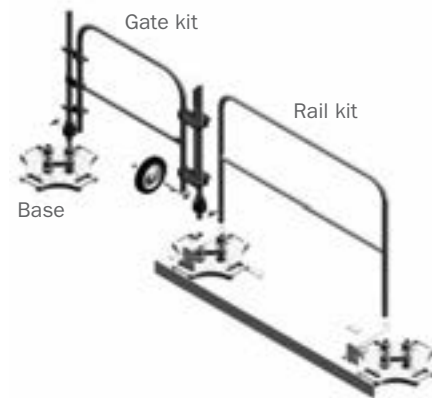

# T-Rail 17

portable and non-penetrating guardrails

## SKYLIGHT PROTECTION



## FALL PROTECTION FOR RE-ROOFING



## HEIGHT SAFETY AROUND MECHANICALS



## T-RAIL 17 ACCESSORIES



# T-Rail 17

portable and non-penetrating guardrail kits

## T-RAIL 17 POWDER COATED KITS – YELLOW BASE AND YELLOW RAILS

PART #	DESCRIPTION	WEIGHT	PRICE
Includes one base, one rail section and two locking pins.			
<b>TR-03Y</b>	3 ft. (1 m) yellow rail kit	114 lbs. (51.7 kg)	<b>\$495.00</b>
<b>TR-03.5Y</b>	3.5 ft. (1.1 m) yellow rail kit	115 lbs. (52 kg)	<b>\$495.00</b>
<b>TR-04Y</b>	4 ft. (1.2 m) yellow rail kit	116 lbs. (52.6 kg)	<b>\$495.00</b>
<b>TR-04AY</b>	4 ft. (1.2 m) yellow rail kit with adjustable midrail	120 lbs. (54.4 kg)	<b>\$560.00</b>
<b>TR-05Y</b>	5 ft. (1.5 m) yellow rail kit	117 lbs. (53.1 kg)	<b>\$495.00</b>
<b>TR-05AY</b>	5 ft. (1.5 m) yellow rail kit with adjustable midrail	122 lbs. (55.3 kg)	<b>\$560.00</b>
<b>TR-06Y</b>	6 ft. (1.8 m) yellow rail kit	119 lbs. (54 kg)	<b>\$510.00</b>
<b>TR-07.5Y</b>	7.5 ft. (2.3 m) yellow rail kit	122 lbs. (55.3 kg)	<b>\$510.00</b>
<b>TR-07.5AY</b>	7.5 ft. (2.3 m) yellow rail kit with adjustable midrail	124 lbs. (56.2 kg)	<b>\$580.00</b>
<b>TR-10Y</b>	10 ft. (3 m) yellow rail kit	127 lbs. (57.6 kg)	<b>\$525.00</b>
<b>TR-10AY</b>	10 ft. (3 m) yellow rail kit with adjustable midrail	127 lbs. (57.6 kg)	<b>\$595.00</b>
<b>TR-01.5LY</b>	19 in. (48 cm) low profile yellow kit – 1 ft. (0.5 m) high	109 lbs. (49.4 kg)	<b>\$400.00</b>

## T-RAIL 17 POWDER COATED GATE KITS – YELLOW BASE AND YELLOW RAILS

PART #	DESCRIPTION	WEIGHT	PRICE
Includes one base, one gate section and two locking pins.			
<b>TG-03Y</b>	3 ft. (1 m) yellow gate kit	159 lbs. (72.1 kg)	<b>\$775.00</b>
<b>TG-03.5Y</b>	3.5 ft. (1.1 m) yellow gate kit	161 lbs. (73 kg)	<b>\$775.00</b>
<b>TG-04Y</b>	4 ft. (1.2 m) yellow gate kit	163 lbs. (73.9 kg)	<b>\$775.00</b>
<b>TG-05Y</b>	5 ft. (1.5 m) yellow gate kit	165 lbs. (74.8 kg)	<b>\$775.00</b>
<b>TG-07.5Y</b>	7.5 ft. (2.3 m) yellow gate kit	168 lbs. (76.2 kg)	<b>\$845.00</b>
<b>TG-10Y</b>	10 ft. (3 m) yellow gate kit	170 lbs. (77.1 kg)	<b>\$845.00</b>

## T-RAIL 17 POWDER COATED RAIL OPTION

PART #	DESCRIPTION	WEIGHT	PRICE
<b>TBY</b>	Yellow base with pads, powder coated	108 lbs. (49 kg)	<b>\$355.00</b>



Rail kit



Gate kit

# T-Rail 17

portable and non-penetrating guardrail kits

## T-RAIL 17 GALVANIZED KITS – GALVANIZED BASE AND RAILS

PART #	DESCRIPTION	WEIGHT	PRICE
Includes one base, one rail section and two locking pins.			
TR-03G	3 ft. (1 m) galvanized rail kit	114 lbs. (51.7 kg)	<b>\$580.00</b>
TR-03.5G	3.5 ft. (1.1 m) galvanized rail kit	115 lbs. (52 kg)	<b>\$580.00</b>
TR-04G	4 ft. (1.2 m) galvanized rail kit	116 lbs. (52.6 kg)	<b>\$580.00</b>
TR-05G	5 ft. (1.5 m) galvanized rail kit	117 lbs. (53.1 kg)	<b>\$580.00</b>
TR-05AG	5 ft. (1.5 m) galvanized rail kit with adjustable midrail	119 lbs. (54 kg)	<b>\$645.00</b>
TR-06G	6 ft. (1.8 m) galvanized rail kit	119 lbs. (54 kg)	<b>\$595.00</b>
TR-07.5G	7.5 ft. (2.3 m) galvanized rail kit	122 lbs. (55.3 kg)	<b>\$595.00</b>
TR-07.5AG	7.5 ft. (2.3 m) galvanized rail kit with adjustable midrail	126 lbs. (57.2 kg)	<b>\$660.00</b>
TR-10G	10 ft. (3 m) galvanized rail kit	127 lbs. (57.6 kg)	<b>\$610.00</b>
TR-10AG	10 ft. (3 m) galvanized rail kit with adjustable midrail	131 lbs. (59.4 kg)	<b>\$680.00</b>
TR-01.5LG	19 in. (48 cm) low profile galvanized kit – 1 ft. (0.5 m) high	109 lbs. (49.4 kg)	<b>\$485.00</b>



## T-RAIL 17 GALVANIZED GATE KITS – GALVANIZED BASE AND RAILS

PART #	DESCRIPTION	WEIGHT	PRICE
Includes one base, one gate section and two locking pins.			
TG-03G	3 ft. (1 m) galvanized gate kit	159 lbs. (72.1 kg)	<b>\$1,035.00</b>
TG-03.5G	3.5 ft. (1.1 m) galvanized gate kit	161 lbs. (73 kg)	<b>\$1,035.00</b>
TG-04G	4 ft. (1.2 m) galvanized gate kit	163 lbs. (73.9 kg)	<b>\$1,035.00</b>
TG-05G	5 ft. (1.5 m) galvanized gate kit	165 lbs. (74.8 kg)	<b>\$1,035.00</b>
TG-07.5G	7.5 ft. (2.3 m) galvanized gate kit	168 lbs. (76.2 kg)	<b>\$1,050.00</b>
TG-10G	10 ft. (3 m) galvanized gate kit	170 lbs. (77.1 kg)	<b>\$1,065.00</b>



## T-RAIL 17 GALVANIZED RAIL OPTION

PART #	DESCRIPTION	WEIGHT	PRICE
TBG	Galvanized base with pads	96 lbs. (43.5 kg)	<b>\$410.00</b>

## T-RAIL 17 GUARDRAILS ACCESSORIES

PART #	DESCRIPTION	WEIGHT	PRICE
TRMBC	Mobile cart for moving railing system	395 lbs. (179.2 kg)	<b>\$3,395.00</b>
TRMV	Base mover with puncture-proof tires	35 lbs. (15.9 kg)	<b>\$499.50</b>



**1 877 472-2336**  
www.actionscaffold.ca



# dock gate

The dock gate provides protection against falls from loading docks. Custom gas struts make the vertical gate easy to open, and tapered guides on the receiver post make for easy alignment when closing.

- Gas struts for ease of operation
- Also available in stainless steel by special order
- Meets or exceeds OSHA standards

Determining the proper gate size for your application only requires the measurement of the inside clear opening.

## DOCK GATE - A36 CARBON STEEL WITH SAFETY YELLOW POWDER COAT

PART #	FITS CLEAR OPENING	OPENING CLEARANCE	WEIGHT	PRICE
<b>GD8Y</b>	8 ft. (2.4 m)	12 ft. (3.7 m)	80 lbs. (36.3 kg)	<b>\$1,660.00</b>
<b>GD10Y</b>	10 ft. (3 m)	15 ft. (4.6 m)	88 lbs. (39.9 kg)	<b>\$2,098.00</b>



height safety / collective protection / guardrails and safety gates

# vertical lift gate

The vertical lift safety gate provides protection in areas that do not have adequate swing clearance. Applications include staircase, ladder and platform openings.

- Available in 4' and 6' widths, the ideal solution for confined spaces.
- Meets or exceeds OSHA standards

Determining the proper gate size for your application only requires the measurement of the inside clear opening.

## VERTICAL LIFT GATE - A36 CARBON STEEL WITH SAFETY YELLOW POWDER COAT

PART #	FITS CLEAR OPENING	OPENING CLEARANCE	WEIGHT	PRICE
<b>GV4Y</b>	4 ft. (1.2 m)	6 ft. (1.8 m)	50 lbs. (22.3 kg)	<b>\$1,510.00</b>
<b>GV6Y</b>	6 ft. (1.8 m)	8 ft. (2.4 m)	60 lbs. (27.2 kg)	<b>\$1,530.00</b>



Custom safety gates for wider openings or unusual handrail configurations also available.  
Please contact customer service with your special requirements!



**1 877 472-2336**  
**www.actionscaffold.ca**



# mezzanine-pivot safety gate

The mezzanine-pivot gate protects employees in elevated mezzanine loading areas. Its counterbalanced gates ensure that one gate is always between your employees and the edge of the platform. The mezzanine-pivot gate is available in single or double pallet widths, breaks down for shipping efficiency and assembles easily with basic tools.

- Easy to install
- Available in carbon steel (galvanized or safety yellow powder coat)
- Meets or exceeds OSHA, IBC and ANSI standards
- Also available in stainless steel

Determining the proper gate size for your application only requires the measurement of the inside clear opening.



## MEZZANINE-PIVOT SAFETY GATE - A36 CARBON STEEL WITH SAFETY YELLOW POWDER COAT

PART #	FITS CLEAR OPENING	MAXIMUM OPEN HEIGHT	WEIGHT	PRICE
<b>GMP64Y</b>	64(w) x 42(h) in. (162.6 x 106.7 cm)	81.65 in. (207.4 cm)	190 lbs. (86.2 kg)	<b>\$1,580.00</b>
<b>GMP113Y</b>	113(w) x 42(h) in. (287 x 106.7 cm)	81.65 in. (207.4 cm)	244 lbs. (110.7 kg)	<b>\$2,262.00</b>

## MEZZANINE-PIVOT SAFETY GATE - A36 CARBON STEEL GALVANIZED

PART #	FITS CLEAR OPENING	MAXIMUM OPEN HEIGHT	WEIGHT	PRICE
<b>GMP64G</b>	64(w) x 42(h) in. (162.6 x 106.7 cm)	81.65 in. (207.4 cm)	196 lbs. (88.9 kg)	<b>\$1,742.00</b>
<b>GMP113G</b>	113(w) x 42(h) in. (287 x 106.7 cm)	81.65 in. (207.4 cm)	244 lbs. (110.7 kg)	<b>\$2,487.00</b>

height safety / collective protection / guardrails and safety gates

# mezzanine clear height safety gate

The mezzanine clear height safety gate protects employees in elevated mezzanine loading areas with no height restrictions to accommodate tall loads. Its counterbalanced gates ensure that one gate is always between your employees and the leading edge, allowing you to load and unload material while keeping your employees safe.

- Easy to install
- Available in carbon steel in safety yellow powder coat
- Meets or exceeds OSHA, IBC and ANSI standards


Determining the proper gate size for your application only requires the measurement of the inside clear opening.



## MEZZANINE CLEAR HEIGHT SAFETY GATE - A36 CARBON STEEL GALVANIZED

PART #	FITS CLEAR OPENING	WEIGHT	PRICE
<b>GMCL64G</b>	64(w) x 42(h) in. (162.6 x 106.7 cm)	190 lbs. (86.2 kg)	<b>\$4,050.00</b>

**Custom safety gates for wider openings or unusual handrail configurations also available.**  
Please contact customer service with your special requirements!



**MISSISSAUGA** | 905.673.6110 | 7151 Fir Tree Dr. | Mississauga, ON L5S 1G4